

PLL 23.0385.840.1/DALI



Description

- prestigious wall luminaire with round design for homogeneous and sophisticated architectural lighting
- no UV and thermal emissions
- sheet steel housing removable via bayonet catch
- opal acrylic glass pane
- mounting plate for easy screw fastening
- 5-pole terminal block
- ballast (LED converter) integrated (with DALI dimming)

Standard options



Special options



Lighting data / Norms




Lamps	LED linear / CRI 80 / 4000 K
EPREL light sources	833873
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	
System power	17.7 W
Luminaire luminous flux	1980 lm
System efficiency	111.86 lm/W
Module efficiency	190.00 lm/W
UGR class	≤22
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights

Outer diameter	385 mm
Height	123 mm
Net weight	3.78 kg
Gross weight	4.44 kg



Colours	Article no.	EAN
silver	633910	4043544359070
white	633911	4043544359087
black	642273	4043544480606

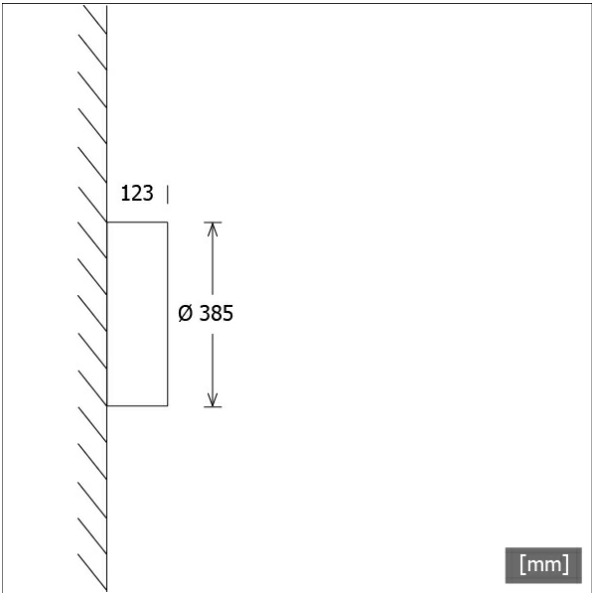


PLL 23.0385.840.1/DALI

PLL 23.0385.840.1/DALI

PL 23 (1xLED 18W 840/4000K 1980lm)

— C0/C180 cd / 1000 lm - - - C90/C270



	C0	C90	C180	C270
0°	360	360	360	360
15°	343	343	343	343
30°	299	299	299	299
45°	234	234	234	234
60°	154	154	154	154
75°	64	64	64	64
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

C0-C180 Plane		C90-C270 Plane	
3.0	8.70 8.71		79.1
6.0	17.41 17.41		19.8
9.0	26.11 26.12		8.8
12.0	34.82 34.82		4.9
15.0	43.52 43.53		3.2

η	LED
Efficiency	110 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	18 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.4
UGR C90/C270	22.4
CIE Flux Codes	48 79 96 100 100
Ra/CRI	>80

LTS

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
Organic Response sensor for surface mounting



ZB-OR-P SENSOR/3000
Organic Response sensor for pendant mounting