



PLL 26.1000.830.1/DALI



Colours	Article no.	EAN
silver	640135	4043544439697
white	640136	4043544439703
black	642208	4043544479976

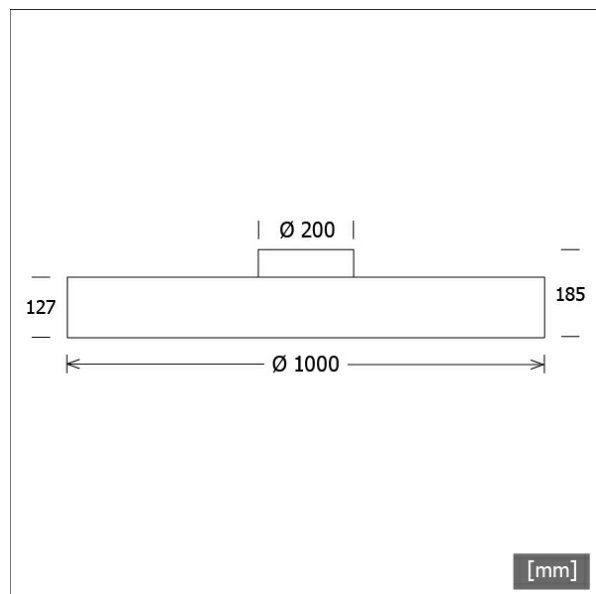

Description

- prestigious surface-mounted luminaire with round design and direct-indirect lighting for a balanced room ambience
- no UV and thermal emissions
- light component: direct 72% / indirect 28%
- sheet steel housing with removable LED unit
- opal insert pane made from acrylic glass
- easy screw mounting via ceiling bracket
- 5-pole terminal block
- ballast (LED converter) integrated (with DALI dimming)

Notes

Direct and indirect light component with separate dimming and switching available on request.

Standard options



Special options



Lighting data / Norms

Lamps	LED linear / CRI 80 / 3000 K
EPREL light sources	833872 833877
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	188.4 W
Luminaire luminous flux	25140 lm
System efficiency	133.43 lm/W
Module efficiency	179.94 lm/W
UGR class	≤22
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20


Dimensions / Weights

Outer diameter	1000 mm
Height	185 mm
Net weight	22.50 kg
Gross weight	26.00 kg

PLL 26.1000.830.1/DALI

PLL 26.1000.830.1/DALI

PL 26 (1xLED 188W 830/3000K 25140lm)



	C0	C90	C180	C270
0°	250	250	250	250
30°	214	213	214	213
60°	113	112	113	112
90°	0	0	0	0
120°	43	43	43	43
150°	84	85	84	85
180°	105	105	105	105
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	134 lm/W
Direct/Indirect	↓ 72% / ↑ 28%
System Power	188 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	21.2
UGR C90/C270	21.2
CIE Flux Codes	47 79 96 72 100
Ra/CRI	>80

LTS

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
Organic Response sensor for surface mounting