


PLL 26.1000.840.1/DALI



Colours	Article no.	EAN
silver	640139	4043544439734
white	640140	4043544439741
black	642210	4043544479990

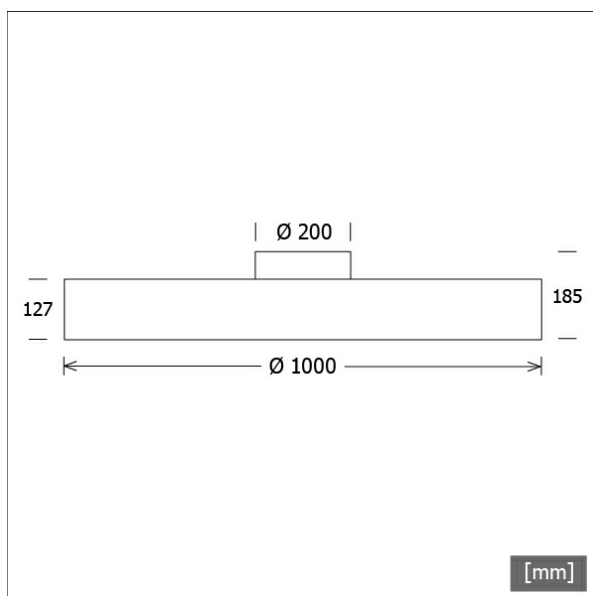

Description

- prestigious surface-mounted luminaire with round design and direct-indirect lighting for a balanced room ambience
- no UV and thermal emissions
- light component: direct 72% / indirect 28%
- sheet steel housing with removable LED unit
- opal insert pane made from acrylic glass
- easy screw mounting via ceiling bracket
- 5-pole terminal block
- ballast (LED converter) integrated (with DALI dimming)

Notes

Direct and indirect light component with separate dimming and switching available on request.

Standard options



Special options



Lighting data / Norms

Lamps	LED linear / CRI 80 / 4000 K
EPREL light sources	833873 833878
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	
System power	188.4 W
Luminaire luminous flux	25600 lm
System efficiency	135.88 lm/W
Module efficiency	187.99 lm/W
UGR class	≤22
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights


Outer diameter	1000 mm
Height	185 mm
Net weight	22.50 kg
Gross weight	26.00 kg

PLL 26.1000.840.1/DALI

PLL 26.1000.840.1/DALI

PL 26 (1xLED 188W 840/4000K 25600lm)

C0/C180 cd / 1000 lm C90/C270



	C0	C90	C180	C270
0°	249	249	249	249
30°	213	212	213	212
60°	112	112	112	112
90°	0	0	0	0
120°	43	43	43	43
150°	85	85	85	85
180°	105	105	105	105
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	136 lm/W
Direct/Indirect	↓ 72% / ↑ 28%
System Power	188 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	21.3
UGR C90/C270	21.3
CIE Flux Codes	47 79 96 72 100
Ra/CRI	>80

LTS

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
Organic Response sensor for surface mounting