


PLL 26.0385.840.2/DALI



Colours	Article no.	EAN
silver	640117	4043544439512
white	640118	4043544439529
black	642215	4043544480040

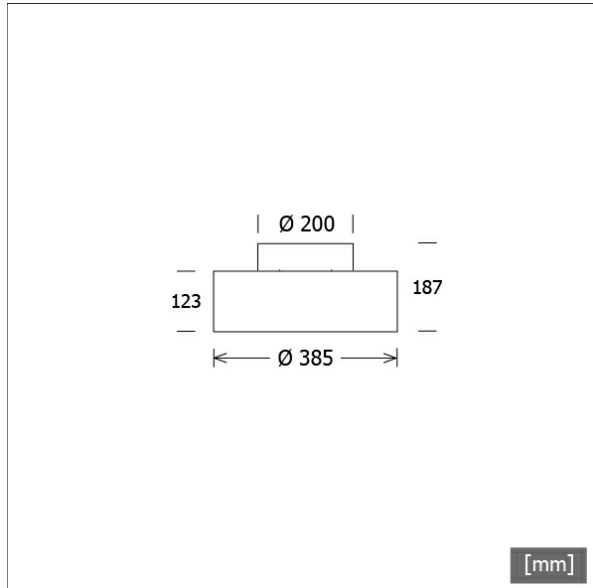

Description

- prestigious surface-mounted luminaire with round design and direct-indirect lighting for a balanced room ambience
- no UV and thermal emissions
- light component: direct 58% / indirect 42%
- sheet steel housing with removable LED unit
- microprismatic insert pane with matt foil made from acrylic glass
- easy screw mounting via ceiling bracket
- 5-pole terminal block
- ballast (LED converter) integrated (with DALI dimming)

Notes

Direct and indirect light component with separate dimming and switching available on request.

Standard options



Special options



Lighting data / Norms

Lamps	LED Modul / CRI 80 / 4000 K
EPREL light sources	833895 833892
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	
System power	25.5 W
Luminaire luminous flux	2620 lm
System efficiency	102.74 lm/W
Module efficiency	188.58 lm/W
UGR class	≤16
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights


Outer diameter	385 mm
Height	187 mm
Net weight	4.74 kg
Gross weight	5.33 kg

PLL 26.0385.840.2/DALI

PLL 26.0385.840.2/DALI

PL 26 (1xLED 26W 840/4000K 2620lm)

— C0/C180 cd / 1000 lm - - - C90/C270



	C0	C90	C180	C270
0°	271	271	271	271
30°	225	224	225	224
60°	63	62	63	62
90°	1	1	1	1
120°	63	64	63	64
150°	129	130	129	130
180°	154	154	154	154
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	101 lm/W
Direct/Indirect	↓ 58% / ↑ 42%
System Power	26 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	16.0
UGR C90/C270	16.1
CIE Flux Codes	60 86 97 58 100
Ra/CRI	>80

LTS

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
Organic Response sensor for surface mounting