




PLL 26.0475.840.1/DALI



Colours	Article no.	EAN
silver	640123	4043544439574
white	640124	4043544439581
black	642218	4043544480071

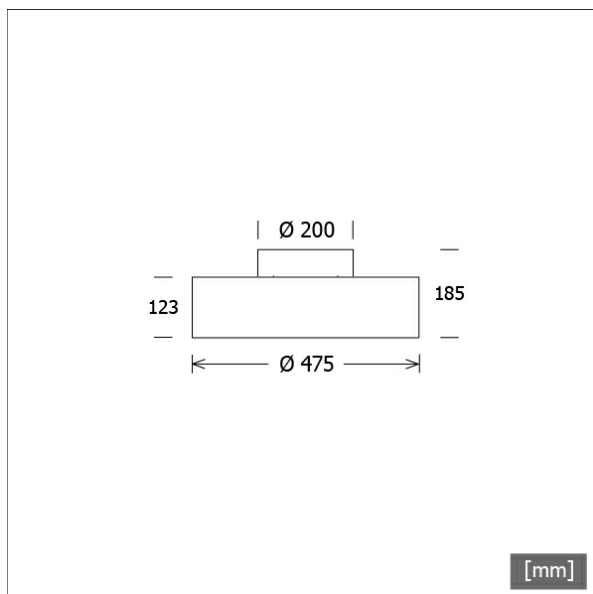

Description

- prestigious surface-mounted luminaire with round design and direct-indirect lighting for a balanced room ambience
- no UV and thermal emissions
- light component: direct 78% / indirect 22%
- sheet steel housing with removable LED unit
- opal insert pane made from acrylic glass
- easy screw mounting via ceiling bracket
- 5-pole terminal block
- ballast (LED converter) integrated (with DALI dimming)

Notes

Direct and indirect light component with separate dimming and switching available on request.

Standard options



Special options



Lighting data / Norms

Lamps	LED Modul / CRI 80 / 4000 K
EPREL light sources	833869 833873
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	
System power	45.8 W
Luminaire luminous flux	5370 lm
System efficiency	117.24 lm/W
Module efficiency	187.06 lm/W
UGR class	≤22
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20


Dimensions / Weights

Outer diameter	475 mm
Height	185 mm
Net weight	6.12 kg
Gross weight	7.00 kg

PLL 26.0475.840.1/DALI

PLL 26.0475.840.1/DALI

PL 26 (1xLED 46W 840/4000K 5370lm)



	C0	C90	C180	C270
0°	284	284	284	284
30°	235	235	235	235
60°	120	120	120	120
90°	1	1	1	1
120°	33	33	33	33
150°	67	66	67	66
180°	77	77	77	77
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	117 lm/W
Direct/Indirect	↓ 78% / ↑ 22%
System Power	46 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	21.8
UGR C90/C270	21.8
CIE Flux Codes	48 79 96 78 100
Ra/CRI	>80

LTS

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
Organic Response sensor for surface mounting