


PLL 26.0475.840.2/DALI



Colours	Article no.	EAN
silver	640125	4043544439598
white	640126	4043544439604
black	642219	4043544480088

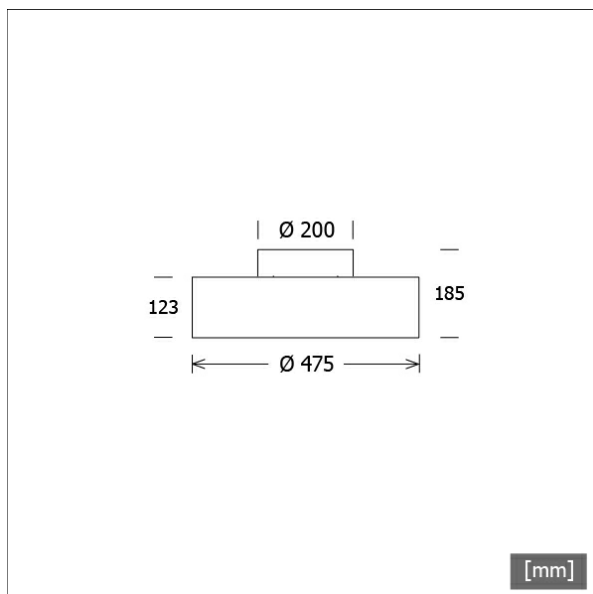

Description

- prestigious surface-mounted luminaire with round design and direct-indirect lighting for a balanced room ambience
- no UV and thermal emissions
- light component: direct 71% / indirect 29%
- sheet steel housing with removable LED unit
- microprismatic insert pane with matt foil made from acrylic glass
- easy screw mounting via ceiling bracket
- 5-pole terminal block
- ballast (LED converter) integrated (with DALI dimming)

Notes

Direct and indirect light component with separate dimming and switching available on request.

Standard options



Special options



Lighting data / Norms

Lamps	LED Modul / CRI 80 / 4000 K
EPREL light sources	833869 833873
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	
System power	45.8 W
Luminaire luminous flux	4100 lm
System efficiency	89.51 lm/W
Module efficiency	187.06 lm/W
UGR class	≤19
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights


Outer diameter	475 mm
Height	185 mm
Net weight	6.12 kg
Gross weight	7.00 kg

PLL 26.0475.840.2/DALI

PLL 26.0475.840.2/DALI

PL 26 (1xLED 46W 840/4000K 4100lm)

— C0/C180 cd / 1000 lm - - - - C90/C270



	C0	C90	C180	C270
0°	331	331	331	331
30°	275	275	275	275
60°	77	79	77	79
90°	1	1	1	1
120°	44	44	44	44
150°	87	88	87	88
180°	101	101	101	101
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	89 lm/W
Direct/Indirect	↓ 71% / ↑ 29%
System Power	46 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	17.7
UGR C90/C270	17.9
CIE Flux Codes	60 87 97 71 100
Ra/CRI	>80

LTS

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
Organic Response sensor for surface mounting