


PLL 26.0675.840.1/DALI



Colours	Article no.	EAN
silver	640131	4043544439659
white	640132	4043544439666
black	642222	4043544480118

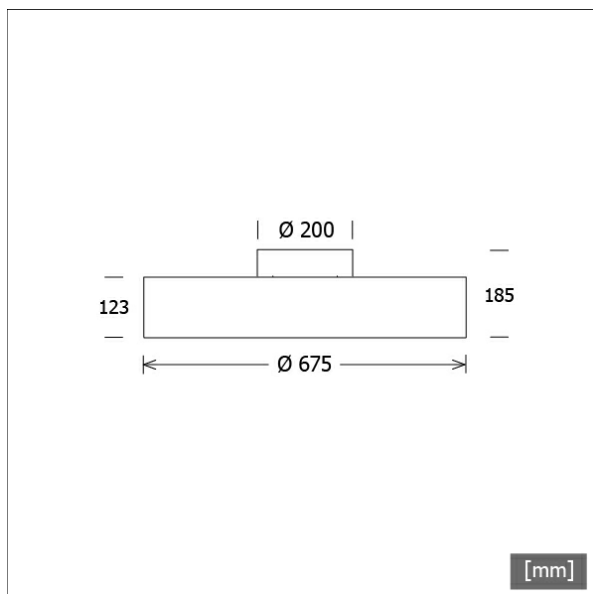

Description

- prestigious surface-mounted luminaire with round design and direct-indirect lighting for a balanced room ambience
- no UV and thermal emissions
- light component: direct 79% / indirect 21%
- sheet steel housing with removable LED unit
- opal insert pane made from acrylic glass
- easy screw mounting via ceiling bracket
- 5-pole terminal block
- ballast (LED converter) integrated (with DALI dimming)

Notes

Direct and indirect light component with separate dimming and switching available on request.

Standard options



Special options



Lighting data / Norms

Lamps	LED linear / CRI 80 / 4000 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	94.3 W
Luminaire luminous flux	10820 lm
System efficiency	114.74 lm/W
Module efficiency	154.00 lm/W
UGR class	≤22
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20


Dimensions / Weights

Outer diameter	675 mm
Height	185 mm
Net weight	10.40 kg
Gross weight	11.84 kg

PLL 26.0675.840.1/DALI

PLL 26.0675.840.1/DALI

PL 26 (1xLED 94W 840/4000K 10820lm)



	C0	C90	C180	C270
0°	283	283	283	283
30°	235	235	235	235
60°	121	121	121	121
90°	1	1	1	1
120°	33	32	33	32
150°	65	65	65	65
180°	76	76	76	76
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	115 lm/W
Direct/Indirect	↓ 79% / ↑ 21%
System Power	94 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	21.8
UGR C90/C270	21.8
CIE Flux Codes	48 79 96 79 100
Ra/CRI	>80

LTS

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
Organic Response sensor for surface mounting