


PLL 26.0675.840.2/DALI



Colours	Article no.	EAN
silver	640133	4043544439673
white	640134	4043544439680
black	642223	4043544480125

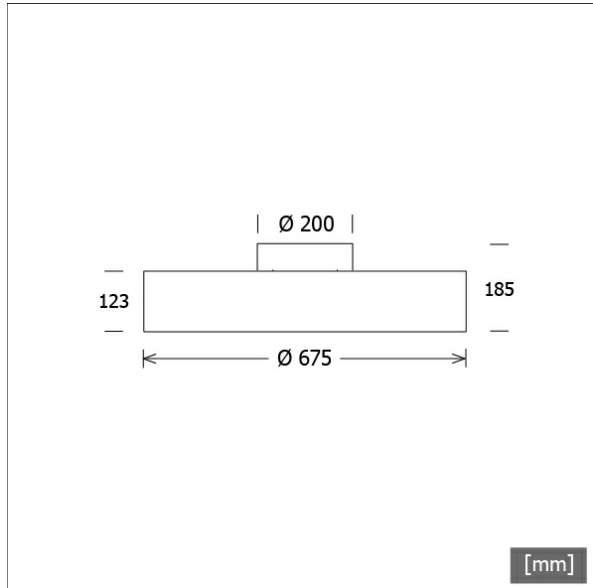

Description

- prestigious surface-mounted luminaire with round design and direct-indirect lighting for a balanced room ambience
- no UV and thermal emissions
- light component: direct 73% / indirect 27%
- sheet steel housing with removable LED unit
- microprismatic insert pane with matt foil made from acrylic glass
- easy screw mounting via ceiling bracket
- 5-pole terminal block
- ballast (LED converter) integrated (with DALI dimming)

Notes

Direct and indirect light component with separate dimming and switching available on request.

Standard options



Special options



Lighting data / Norms

Lamps	LED linear / CRI 80 / 4000 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	94.3 W
Luminaire luminous flux	8520 lm
System efficiency	90.34 lm/W
Module efficiency	154.00 lm/W
UGR class	≤19
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights


Outer diameter	675 mm
Height	185 mm
Net weight	10.40 kg
Gross weight	11.84 kg

PLL 26.0675.840.2/DALI

PLL 26.0675.840.2/DALI

PL 26 (1xLED 94W 840/4000K 8520lm)

— C0/C180 cd / 1000 lm - - - C90/C270



	C0	C90	C180	C270
0°	336	336	336	336
30°	279	278	279	278
60°	80	74	80	74
90°	0	0	0	0
120°	43	42	43	42
150°	84	84	84	84
180°	98	98	98	98
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	91 lm/W
Direct/Indirect	↓ 72% / ↑ 28%
System Power	94 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	17.9
UGR C90/C270	17.8
CIE Flux Codes	60 87 97 72 100
Ra/CRI	>80

LTS

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
Organic Response sensor for surface mounting