




PLL 28.0385.830.2/DALI



Colours	Article no.	EAN
silver	640145	4043544439796
white	640146	4043544439802
black	642245	4043544480323

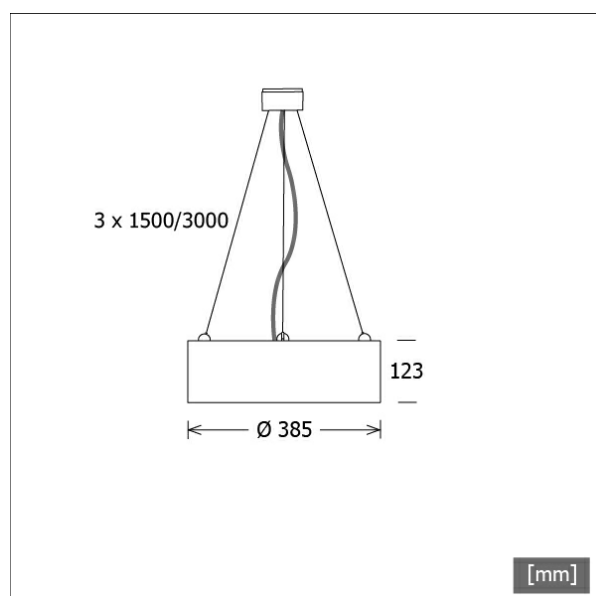

Description

- prestigious pendant luminaire in round design with homogeneous and direct-indirect lighting for a balanced room ambience
- no UV and thermal emissions
- light component: direct 58% / indirect 42%
- sheet steel housing with removable LED unit
- wire-rope suspension to be ordered separately (ceiling canopy in luminaire colour)
- microprismatic insert pane with matt foil made from acrylic glass
- 5-pole terminal block
- ballast (LED converter) integrated (with DALI dimming)

Notes

Direct and indirect light component with separate dimming and switching available on request.

Standard options



Special options



Lighting data / Norms

Lamps	LED Modul / CRI 80 / 3000 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	25.5 W
Luminaire luminous flux	2540 lm
System efficiency	99.60 lm/W
UGR class	≤16
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights


Outer diameter	385 mm
Height	123 mm
Net weight	4.02 kg
Gross weight	4.64 kg

PLL 28.0385.830.2/DALI

PLL 28.0385.830.2/DALI

PL 28 (1xLED 26W 830/3000K 2540lm)

C0/C180 cd / 1000 lm C90/C270



	C0	C90	C180	C270
0°	271	271	271	271
30°	225	224	225	224
60°	64	62	64	62
90°	1	1	1	1
120°	62	64	62	64
150°	129	130	129	130
180°	151	151	151	151
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	98 lm/W
Direct/Indirect	↓ 58% / ↑ 42%
System Power	26 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	15.9
UGR C90/C270	16.0
CIE Flux Codes	60 86 97 58 100
Ra/CRI	>80

LTS

Accessories



L 73/1500 DIM
wire-rope kit 3-fold
(length: 1500 mm, 5-core cable)



L 73/3000 DIM
wire-rope kit 3-fold
(length: 3000 mm, 5-core cable)



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
Organic Response sensor for surface mounting



ZB-OR-P SENSOR/3000
Organic Response sensor for pendant mounting