


PLL 28.0475.830.2/DALI



Colours	Article no.	EAN
silver	640153	4043544439871
white	640154	4043544439888
black	642249	4043544480361

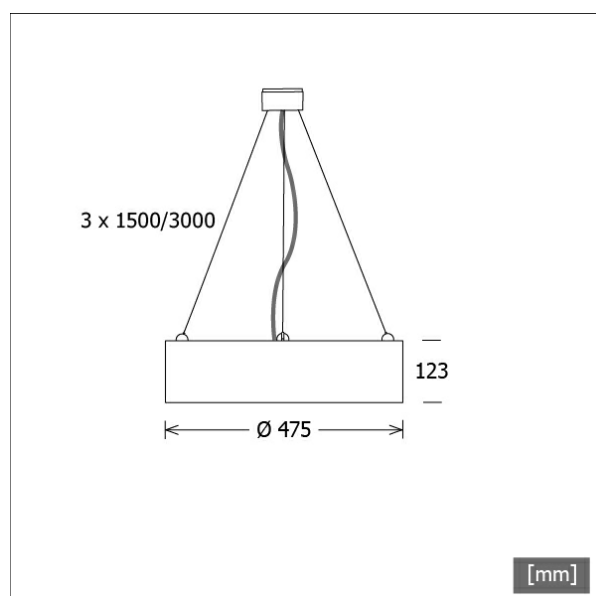

Description

- prestigious pendant luminaire in round design with homogeneous and direct-indirect lighting for a balanced room ambience
- no UV and thermal emissions
- light component: direct 71% / indirect 29%
- sheet steel housing with removable LED unit
- wire-rope suspension to be ordered separately (ceiling canopy in luminaire colour)
- microprismatic insert pane with matt foil made from acrylic glass
- 5-pole terminal block
- ballast (LED converter) integrated (with DALI dimming)

Notes

Direct and indirect light component with separate dimming and switching available on request.

Standard options



Special options



Lighting data / Norms

Lamps	LED Modul / CRI 80 / 3000 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	45.8 W
Luminaire luminous flux	3980 lm
System efficiency	86.89 lm/W
UGR class	≤19
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights


Outer diameter	475 mm
Height	123 mm
Net weight	5.30 kg
Gross weight	6.30 kg

PLL 28.0475.830.2/DALI

PLL 28.0475.830.2/DALI

PL 28 (1xLED 46W 830/3000K 3980lm)

— C0/C180 cd / 1000 lm - - - - - C90/C270



	C0	C90	C180	C270
0°	327	327	327	327
30°	268	266	268	266
60°	64	60	64	60
90°	1	1	1	1
120°	45	45	45	45
150°	90	90	90	90
180°	103	103	103	103
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	87 lm/W
Direct/Indirect	↓ 70% / ↑ 30%
System Power	46 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	17.2
UGR C90/C270	17.2
CIE Flux Codes	60 87 97 70 100
Ra/CRI	>80

LTS

Accessories



L 73/1500 DIM
wire-rope kit 3-fold
(length: 1500 mm, 5-core cable)



L 73/3000 DIM
wire-rope kit 3-fold
(length: 3000 mm, 5-core cable)



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
Organic Response sensor for surface mounting



ZB-OR-P SENSOR/3000
Organic Response sensor for pendant mounting