




PLL 28.0675.830.2/DALI



Colours	Article no.	EAN
silver	640161	4043544439956
white	640162	4043544439963
black	642253	4043544480408

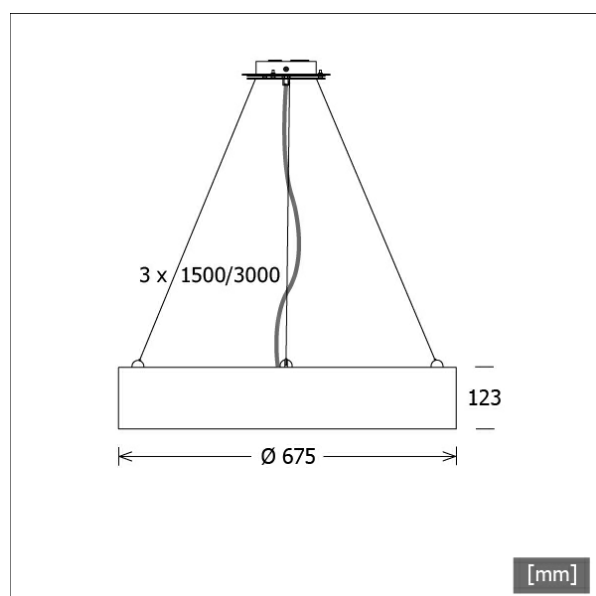

Description

- prestigious pendant luminaire in round design with homogeneous and direct-indirect lighting for a balanced room ambience
- no UV and thermal emissions
- light component: direct 73% / indirect 27%
- sheet steel housing with removable LED unit
- wire-rope suspension to be ordered separately (ceiling canopy in luminaire colour)
- microprismatic insert pane with matt foil made from acrylic glass
- 5-pole terminal block
- ballast (LED converter) integrated (with DALI dimming)

Notes

Direct and indirect light component with separate dimming and switching available on request.

Standard options



Special options



Lighting data / Norms

Lamps	LED linear / CRI 80 / 3000 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	94.3 W
Luminaire luminous flux	8270 lm
System efficiency	87.69 lm/W
Module efficiency	147.00 lm/W
UGR class	≤19
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights


Outer diameter	675 mm
Height	123 mm
Net weight	10.00 kg
Gross weight	11.50 kg

PLL 28.0675.830.2/DALI

PLL 28.0675.830.2/DALI

PL 28 (1xLED 94W 830/3000K 8270lm)

— C0/C180 cd / 1000 lm — C90/C270



	C0	C90	C180	C270
0°	336	336	336	336
30°	283	273	283	273
60°	71	58	71	58
90°	1	1	1	1
120°	43	41	43	41
150°	84	83	84	83
180°	95	95	95	95
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	88 lm/W
Direct/Indirect	↓ 73% / ↑ 27%
System Power	94 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	17.5
UGR C90/C270	17.4
CIE Flux Codes	60 87 97 73 100
Ra/CRI	>80

LTS

Accessories



L 74/1500 DIM
wire-rope kit 3-fold
(length: 1500 mm, 5-core cable)



L 74/3000 DIM
wire-rope kit 3-fold
(length: 3000 mm, 5-core cable)



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
Organic Response sensor for surface mounting



ZB-OR-P SENSOR/3000
Organic Response sensor for pendant mounting