

PLL 59.12030.830.2/DALI



Description

- recessed light field for suspended ceiling systems with visible T profile module (1200 x 300)
- homogeneous lighting surface
- no UV and thermal emissions
- tool-free installation
- outstanding ease of maintenance
- white luminaire housing made from sheet steel
- positioning of the ballast outside on the luminaire body
- luminaire simple plug connection to ballast
- operation possible with or without DALI
- microprismatic acrylic glass with white polycarbonate foil
- tool-free insertion into ceiling
- ballast (LED converter) included (with DALI dimming)

Standard options

4000 K

Special options

CRI 90
SDCM3

TWL

Lighting data / Norms




Lamps	LED Matrix / CRI 80 / 3000 K
EPREL light sources	832756
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	46.1 W
Luminaire luminous flux	4630 lm
System efficiency	100.43 lm/W
Module efficiency	193.10 lm/W
UGR class	≤22
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights

Length	1194 mm
Width	294 mm
Height	65 mm
Recessed depth	125 mm
Net weight	7.06 kg
Gross weight	9.40 kg



Colours	Article no.	EAN
	633980	4043544359766

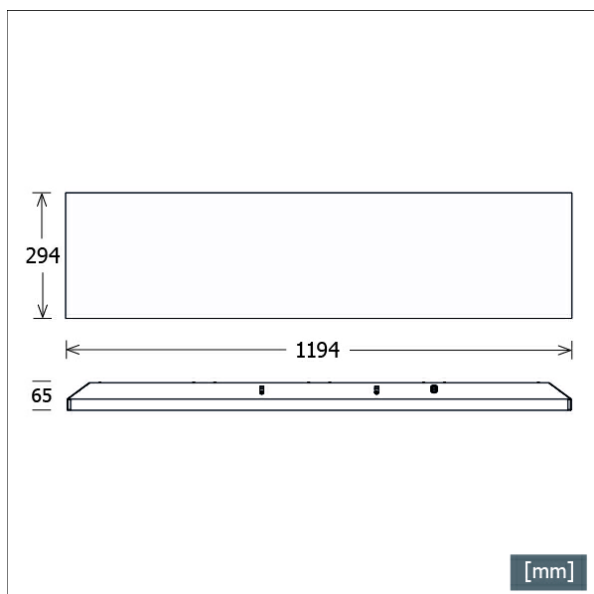


PLL 59.12030.830.2/DALI

PLL 59.12030.830.2/DALI

PL 59 (1xLED 46W 830/3000K 4630lm)

— C0/C180 cd / 1000 lm - - - C90/C270



	C0	C90	C180	C270
0°	457	457	457	457
15°	435	434	435	434
30°	378	375	378	375
45°	234	226	234	226
60°	108	94	108	94
75°	43	38	43	38
90°	1	1	1	1
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

	C0-C180 Plane	C90-C270 Plane	
3.0	6.18 5.95	234.9	
6.0	12.37 11.90	58.7	
9.0	18.55 17.85	26.1	
12.0	24.73 23.80	14.7	
15.0	30.92 29.75	9.4	

η	LED
Efficiency	101 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	46 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	19.7
UGR C90/C270	19.2
CIE Flux Codes	59 86 97 100 100
Ra/CRI	>80

LTS

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-R SENSOR
Organic Response sensor for recessed mounting