



ASCL 11.0630.2 DIM



Colours	Article no.	EAN
silver	634340	4043544364043
white	634341	4043544364050

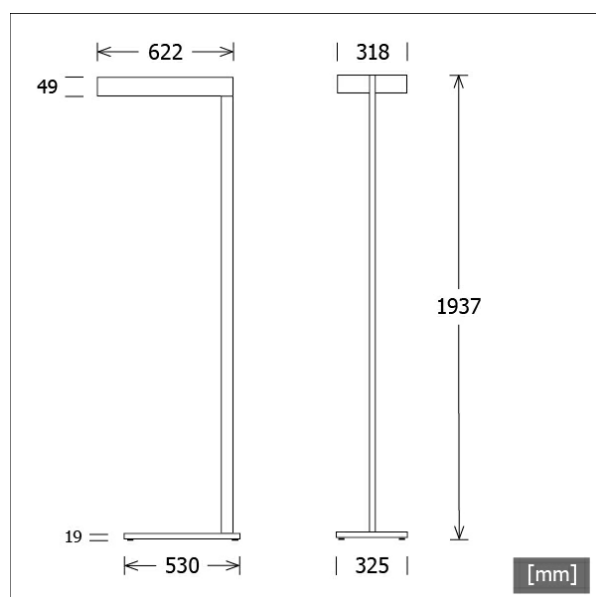


Description

- free-standing luminaire with direct illumination for uniform and glare-free workplace lighting
- no UV and thermal emissions
- twin light-head made from die-cast aluminium
- standard base made from steel St37 (special version ZBB 002 please indicate when ordering)
- rectangular aluminium stand (silver luminaire with silver anodised stand)
- switchDIM with memory function (ON/OFF short pushbutton press, dimming UP/DOWN long pushbutton press)
- diffusers made from prismatic acrylic glass
- central plug connection to mains (length of connecting cable: approx. 3000 mm), silver luminaire / black cable, white luminaire / white cable
- ballast (LED converter) integrated in the stand



Standard options



Lighting data / Norms


Lamps	LED linear / CRI 80 / 3000 K
EPREL light sources	833877
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	50.0 W
Luminaire luminous flux	2910 lm
System efficiency	58.20 lm/W
Module efficiency	178.36 lm/W
UGR class	≤19
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights

Length	622 mm
Width	325 mm
Height	1937 mm
Net weight	17.06 kg
Gross weight	18.26 kg

ASCL 11.0630.2 DIM

Ascona (1xLED 50W 830/3000K 2910lm)




	C0	C90	C180	C270
0°	592	592	592	592
15°	551	558	551	558
30°	419	445	419	445
45°	202	236	202	236
60°	60	60	60	60
75°	30	28	30	28
90°	1	1	1	1
cd / 1000 lm				

Offset [m]	Cone width [m]		Illuminance [lx]
	C0-C180 Plane	C90-C270 Plane	
3.0	4.88	5.39	191.4
6.0	9.76	10.77	47.8
9.0	14.64	16.16	21.3
12.0	19.52	21.54	12.0
15.0	24.40	26.93	7.7

η	LED
Efficiency	58 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	50 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	17.0
UGR C90/C270	17.2
CIE Flux Codes	69 91 97 100 100
Ra/CRI	>80

LTS

Accessories



ZBB 002
luminaire base version 2