


# SCEKLP 6.2030.25



Colours	Article no.	EAN
black	637039	4043544396495
silver	637040	4043544396501
white	637041	4043544396518

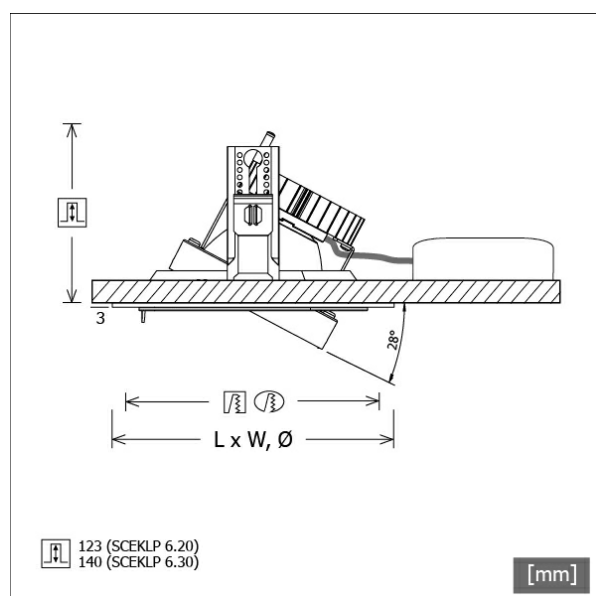

## Description

- flexible recessed spotlight system consisting of recessed frames, light-heads and ballasts (recessed frames to be ordered separately)
- light-head pivots through 28° via gimbals
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management with passive cooling (heat sink made from aluminium)
- gimbals made from die-cast zinc and polycarbonate
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- clear safety glass
- light-head snaps into mounting frame without tools
- connection to ballast via luminaire cable with Mini-Clamp connector
- ballast (LED converter) included (external placement)

## Standard options



## Special options



## Lighting data / Norms

Lamps	LED Spot / CRI 80 / 3000 K
EPREL light sources	848117
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	25.8 W
Luminaire luminous flux	2700 lm
System efficiency	104.65 lm/W
Module efficiency	156.64 lm/W
UGR class	≤19
Beam range	Medium Flood
Beam angle	27°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	III
Type of protection	IP20


## Dimensions / Weights

Height	126 mm
Recessed depth	123 mm
Diameter of light head	154 mm
Net weight	0.80 kg
Gross weight	0.84 kg

# SCEKLP 6.2030.25

## SCEKLP 6.2030.25

Scene 6 System | Light-Head (1xLED 26W 830/3000K 2700lm)

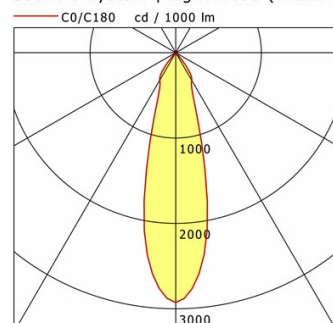


	C0	C90	C180	C270
0°	2927	2927	2927	2927
15°	1248	1248	1248	1248
30°	373	373	373	373
45°	24	24	24	24
60°	3	3	3	3
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
C0-C180 Plane		
3.0	1.47	878.1
6.0	2.94	219.5
9.0	4.41	97.6
12.0	5.89	54.9
15.0	7.36	35.1

<b>η</b>	LED
Efficiency	104 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	26 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	19.2
UGR C90/C270	19.2
CIE Flux Codes	97 100 100 100 100
Ra/CRI	>80

LTS


## Accessories




**SCER 6.100**  
mounting frame 1-lamp



**SCER 6.111**  
mounting frame (round) 1-lamp



**SCER 6.200**  
mounting frame 2-lamp




**SCER 6.300**  
mounting frame 3-lamp



**SCER 6.310**  
mounting frame (round) 3-lamp



**SCER 6.330**  
corner mounting frame 3-lamp



**SCER 6.400**  
mounting frame 4-lamp