


SCEKLP 6.2030.35



Colours	Article no.	EAN
black	637042	4043544396525
silver	637043	4043544396532
white	637044	4043544396549









Description

- flexible recessed spotlight system consisting of recessed frames, light-heads and ballasts (recessed frames to be ordered separately)
- light-head pivots through 28° via gimbals
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management with passive cooling (heat sink made from aluminium)
- gimbals made from die-cast zinc and polycarbonate
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- clear safety glass
- light-head snaps into mounting frame without tools
- connection to ballast via luminaire cable with Mini-Clamp connector
- ballast (LED converter) included (external placement)

Standard options



Special options



Lighting data / Norms

Lamps EPREL light sources

Lifetime

System power Luminaire luminous flux System efficiency Module efficiency UGR class Beam range Beam angle Supply voltage Protection class Type of protection 848117 L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h 25.8 W 2680 lm 103.87 lm/W 156.64 lm/W ≤22 Flood 33° 220 - 240 V / 50 - 60 Hz III IP20

LED Spot / CRI 80 / 3000 K

Dimensions / Weights


Height	126 mm
Recessed depth	123 mm
Diameter of light head	154 mm
Net weight	0.80 kg
Gross weight	0.84 kg

Recessed Spotlights · Scene 6 System

SCEKLP 6.2030.35

SCEKLP 6.2030.35

Scene 6 System | Light-Head (1xLED 26W 830/3000K 2680Im)

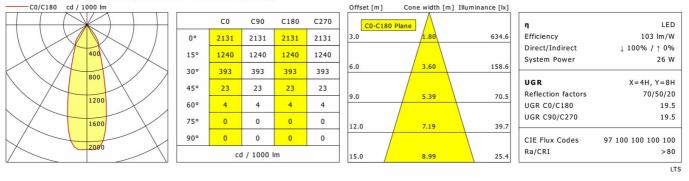

Accessories



SCER 6.100 mounting frame 1-lamp



SCER 6.111 mounting frame (round) 1-lamp



SCER 6.200 mounting frame 2-lamp



SCER 6.300 mounting frame 3-lamp



SCER 6.310 mounting frame (round) 3-lamp



SCER 6.330 corner mounting frame 3-lamp



SCER 6.400 mounting frame 4-lamp

