


SCEKLP 6.2030.45/DALI



Colours	Article no.	EAN
black	645148	4043544517111
silver	645149	4043544517128
white	645150	4043544517135

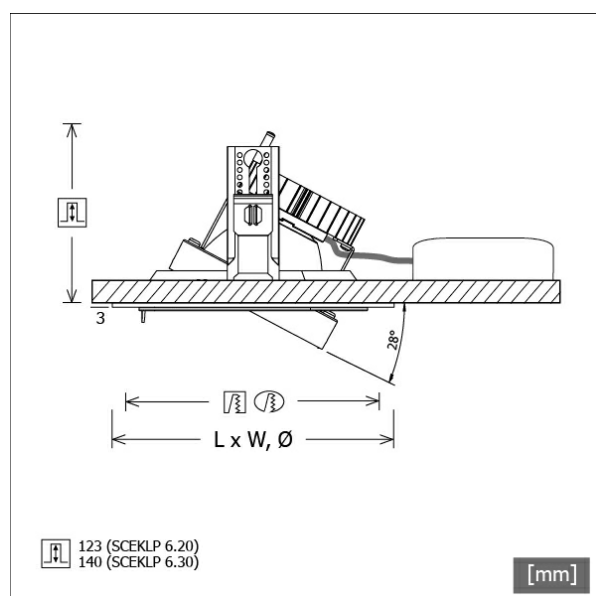

Description

- flexible recessed spotlight system consisting of recessed frames, light-heads and ballasts (recessed frames to be ordered separately)
- light-head pivots through 28° via gimbals
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management with passive cooling (heat sink made from aluminium)
- gimbals made from die-cast zinc and polycarbonate
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- clear safety glass
- light-head snaps into mounting frame without tools
- connection to ballast via luminaire cable with Mini-Clamp connector
- ballast (LED converter DALI, dimmable) included (external placement)

Standard options



Special options



Lighting data / Norms

Lamps	LED Spot / CRI 80 / 3000 K
EPREL light sources	848117
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	25.8 W
Luminaire luminous flux	2650 lm
System efficiency	102.71 lm/W
Module efficiency	156.64 lm/W
UGR class	≤22
Beam range	Wide Flood
Beam angle	49°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	III
Type of protection	IP20


Dimensions / Weights

Height	126 mm
Recessed depth	123 mm
Diameter of light head	154 mm
Net weight	0.86 kg
Gross weight	0.90 kg

SCEKLP 6.2030.45/DALI

SCEKLP 6.2030.45/DALI

Scene 6 System | Light-Head (1xLED 26W 830/3000K 2650lm)




	C0	C90	C180	C270
0°	1377	1377	1377	1377
15°	1216	1216	1216	1216
30°	491	491	491	491
45°	19	19	19	19
60°	3	3	3	3
75°	1	1	1	1
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
C0-C180 Plane		
3.0	2.73	405.5
6.0	5.46	101.4
9.0	8.20	45.1
12.0	10.93	25.3
15.0	13.66	16.2

η	LED
Efficiency	102 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	26 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	20.1
UGR C90/C270	20.1
CIE Flux Codes	98 100 100 100 100
Ra/CRI	>80

LTS


Accessories




SCER 6.100
mounting frame 1-lamp



SCER 6.111
mounting frame (round) 1-lamp




SCER 6.200
mounting frame 2-lamp




SCER 6.300
mounting frame 3-lamp



SCER 6.310
mounting frame (round) 3-lamp



SCER 6.330
corner mounting frame 3-lamp



SCER 6.400
mounting frame 4-lamp



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-R SENSOR
Organic Response sensor for recessed mounting