



# SCEKLP TRI 6.2040.15



Colours	Article no.	EAN
black	639265	4043544424518
silver	639266	4043544424525
white	639267	4043544424532

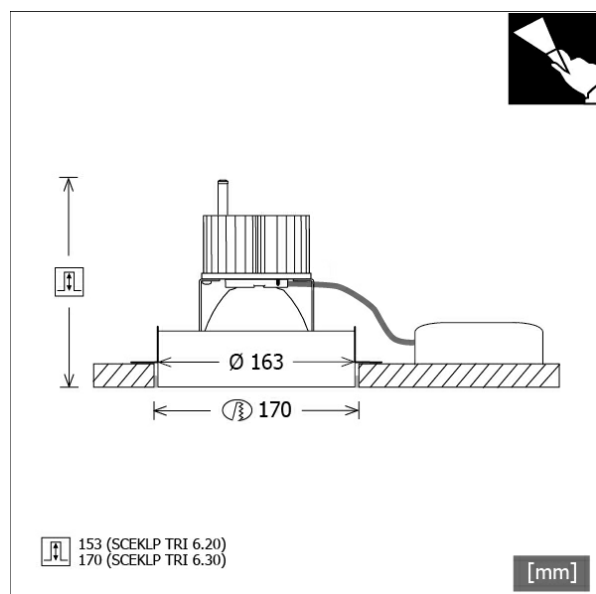

## Description

- trimless recessed spotlight for plasterboard mounting (flush with ceiling)
- light-head recessed into ceiling by 30 mm and pivots through 28° via gimbals
- inclusive white ceiling recessed ring made from sheet steel
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management with passive cooling (heat sink made from aluminium)
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- gimbals made from die-cast zinc and polycarbonate
- clear safety glass
- easy installation of the mounting ring with drywall screws (light-head snaps in without tools)
- luminaire and ballast permanently connected via cable (length: 500 mm), ballast ready for mains connection
- ballast (LED converter) included (external placement)


## Notes

Pretreat the plaster zone on the luminaire and ceiling with suitable adhesion primer.

## Standard options



## Special options

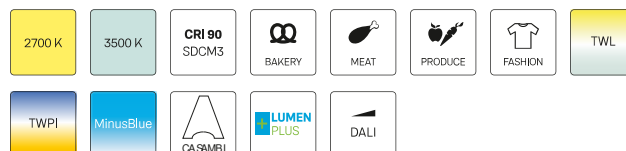

## Lighting data / Norms

Lamps	LED Spot / CRI 80 / 4000 K
EPREL light sources	848119
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	25.8 W
System power	2850 lm
Luminaire luminous flux	110.46 lm/W
System efficiency	160.37 lm/W
Module efficiency	≤19
UGR class	Spot
Beam range	14°
Beam angle	220 - 240 V / 50 - 60 Hz
Supply voltage	II
Protection class	IP20
Type of protection	


## Dimensions / Weights

Outer diameter	163 mm
Height	126 mm
Cut-out (Ø)	170 mm
Ceiling thickness	12.5 - 12.5 mm

Recessed Spotlights · Scene 6 Trimless

SCEKLP TRI 6.2040.15

Recessed depth  
Diameter of light head  
Net weight  
Gross weight




LTS  
LOVE TO SHINE

153 mm  
154 mm  
0.94 kg  
0.99 kg

SCEKLP TRI 6.2040.15

**SCEKLP TRI 6.2040.15**

Scene 6 Trimless (1xLED 26W 840/4000K 2850lm 15°)



	C0	C90	C180	C270
0°	6451	6451	6451	6451
15°	838	838	838	838
30°	372	372	372	372
45°	19	19	19	19
60°	1	1	1	1
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	0.77	2042.7
6.0	1.54	510.7
9.0	2.30	227.0
12.0	3.07	127.7
15.0	3.84	81.7

<b>η</b>	LED
Efficiency	110 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	26 W
<b>UGR</b>	
	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	19.2
UGR C90/C270	19.2
<b>CIE Flux Codes</b>	
	98 100 100 100 100
Ra/CRI	>80