


# SCEKLP TRI 6.2040.45



Colours	Article no.	EAN
black	639274	4043544424600
silver	639275	4043544424617
white	639276	4043544424624

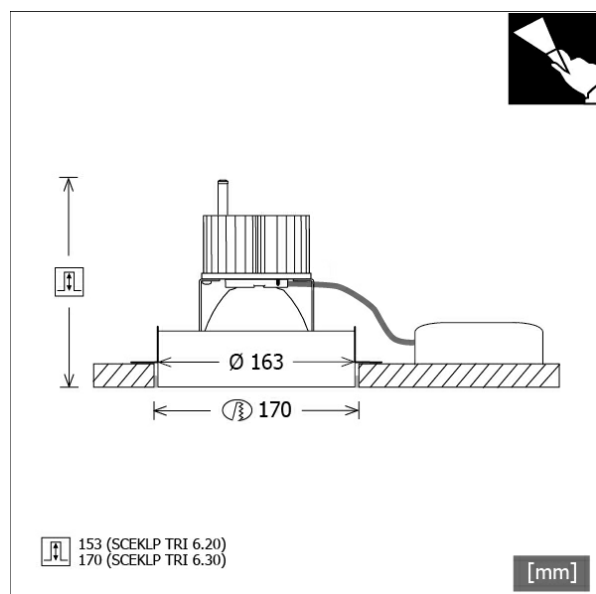


## Description

- trimless recessed spotlight for plasterboard mounting (flush with ceiling)
- light-head recessed into ceiling by 30 mm and pivots through 28° via gimbals
- inclusive white ceiling recessed ring made from sheet steel
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management with passive cooling (heat sink made from aluminium)
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- gimbals made from die-cast zinc and polycarbonate
- clear safety glass
- easy installation of the mounting ring with drywall screws (light-head snaps in without tools)
- luminaire and ballast permanently connected via cable (length: 500 mm), ballast ready for mains connection
- ballast (LED converter) included (external placement)


## Notes

Pretreat the plaster zone on the luminaire and ceiling with suitable adhesion primer.

## Standard options



## Special options

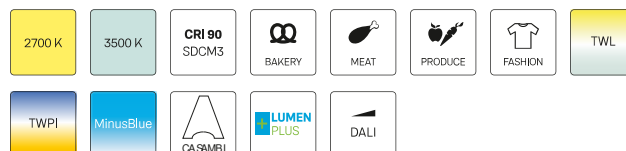

## Lighting data / Norms

Lamps	LED Spot / CRI 80 / 4000 K
EPREL light sources	848119
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	25.8 W
System power	2790 lm
Luminaire luminous flux	108.13 lm/W
System efficiency	160.37 lm/W
Module efficiency	≤22
UGR class	Wide Flood
Beam range	49°
Beam angle	220 - 240 V / 50 - 60 Hz
Supply voltage	II
Protection class	IP20
Type of protection	


## Dimensions / Weights

Outer diameter	163 mm
Height	126 mm
Cut-out (Ø)	170 mm
Ceiling thickness	12.5 - 12.5 mm

Recessed Spotlights · Scene 6 Trimless

SCEKLP TRI 6.2040.45

Recessed depth  
Diameter of light head  
Net weight  
Gross weight



LTS  
LOVE TO SHINE

153 mm  
154 mm  
0.94 kg  
0.99 kg

# SCEKLP TRI 6.2040.45

## SCEKLP TRI 6.2040.45

Scene 6 Trimless (1xLED 26W 840/4000K 2790lm 45°)

