




SCEKLP TRI 6.3040.25

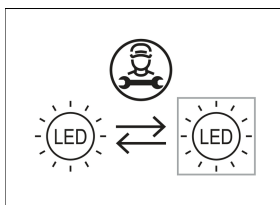

Colours	Article no.	EAN
black	639292	4043544424785
silver	639293	4043544424792
white	639294	4043544424808

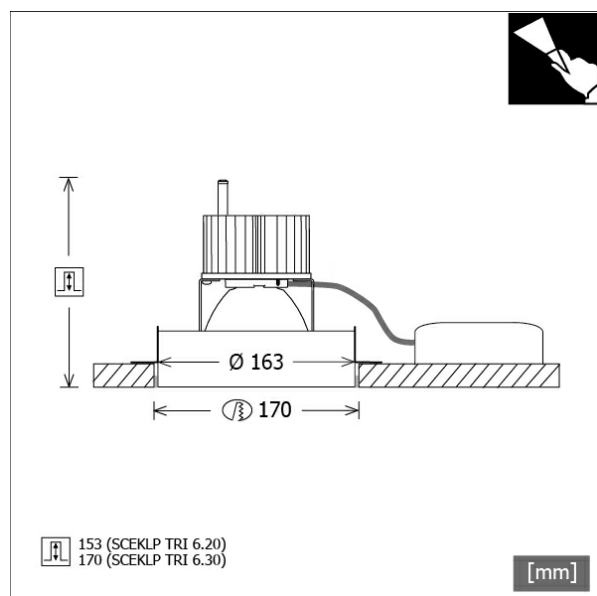


Description

- trimless recessed spotlight for plasterboard mounting (flush with ceiling)
- light-head recessed into ceiling by 30 mm and pivots through 28° via gimbals
- inclusive white ceiling recessed ring made from sheet steel
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management with passive cooling (heat sink made from aluminium)
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- gimbals made from die-cast zinc and polycarbonate
- clear safety glass
- easy installation of the mounting ring with drywall screws (light-head snaps in without tools)
- luminaire and ballast permanently connected via cable (length: 500 mm), ballast ready for mains connection
- ballast (LED converter) included (external placement)


Notes

Pretreat the plaster zone on the luminaire and ceiling with suitable adhesion primer.

Standard options



Special options

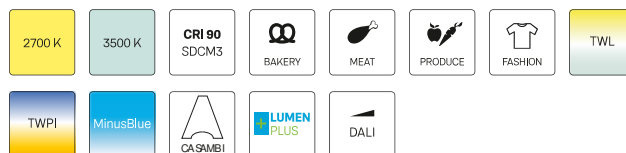

Lighting data / Norms

Lamps	LED Spot / CRI 80 / 4000 K
EPREL light sources	851282
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	32.8 W
System power	3760 lm
Luminaire luminous flux	114.63 lm/W
System efficiency	162.17 lm/W
Module efficiency	≤22
UGR class	Medium Flood
Beam range	27°
Beam angle	220 - 240 V / 50 - 60 Hz
Supply voltage	II
Protection class	IP20
Type of protection	


Dimensions / Weights

Outer diameter	163 mm
Height	143 mm
Cut-out (Ø)	170 mm
Ceiling thickness	12.5 - 12.5 mm

Recessed Spotlights · Scene 6 Trimless

SCEKLP TRI 6.3040.25

Recessed depth
Diameter of light head
Net weight
Gross weight



LTS
LOVE TO SHINE


170 mm
154 mm
1.08 kg
1.14 kg

SCEKLP TRI 6.3040.25

SCEKLP TRI 6.3040.25

Scene 6 Trimless (1xLED 33W 840/4000K 3760lm 25°)

C0/C180 cd / 1000 lm



	C0	C90	C180	C270
0°	2875	2875	2875	2875
15°	1264	1264	1264	1264
30°	369	369	369	369
45°	19	19	19	19
60°	3	3	3	3
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

C0-C180 Plane		
3.0	1.50	1201.0
6.0	3.00	300.2
9.0	4.50	133.4
12.0	6.00	75.1
15.0	7.50	48.0

η	LED
Efficiency	114 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	33 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	20.3
UGR C90/C270	20.3
CIE Flux Codes	98 100 100 100 100
Ra/CRI	>80

LTS