




SCELP 401.1027.15/DALI



Colours	Article no.	EAN
black	643816	4043544500229
silver	643817	4043544500236
white	643818	4043544500243

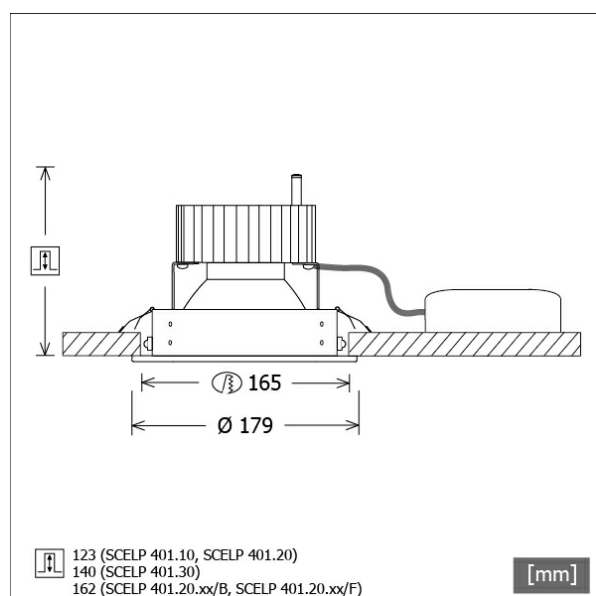


Description

- recessed spotlight with wide range of applications
- light-head pivots through 27° on gimbals
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management with passive cooling (heat sink made from aluminium)
- gimbals made from die-cast zinc
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- recessed ring made from sheet steel
- clear safety glass
- tool-free ceiling mounting via quick-action clamping springs (automatic adjustment of the ceiling thickness)
- luminaire and ballast permanently connected via cable (length: 500 mm), ballast ready for mains connection
- ballast (LED converter DALI, dimmable) included (external placement)

Standard options



Special options

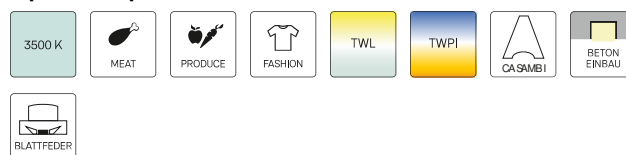

Lighting data / Norms

Lamps	LED Spot / CRI 90 / 2700 K
EPREL light sources	848120
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	13.4 W
Luminaire luminous flux	1340 lm
System efficiency	100.00 lm/W
Module efficiency	127.18 lm/W
UGR class	≤19
Beam range	Spot
Beam angle	14°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	II
Type of protection	IP20


Dimensions / Weights

Outer diameter	179 mm
Height	127 mm
Cut-out (Ø)	165 mm
Ceiling thickness	10.0 - 30.0 mm
Recessed depth	123 mm
Diameter of light head	140 mm
Net weight	1.07 kg

Recessed Spotlights · Scene 4

SCELP 401.1027.15/DALI

Gross weight



LTS
LOVE TO SHINE


1.21 kg

SCELP 401.1027.15/DALI

SCELP 401.1027.15/DALI

Scene 4 (1xLED 13W 827/2700K 1340lm 15°)

C0/C180 cd / 1000 lm



	C0	C90	C180	C270
0°	6496	6496	6496	6496
15°	845	845	845	845
30°	378	378	378	378
45°	21	21	21	21
60°	1	1	1	1
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	0.75	967.1
6.0	1.51	241.8
9.0	2.26	107.5
12.0	3.02	60.4
15.0	3.77	38.7

η	LED
Efficiency	103 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	13 W

UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	16.6
UGR C90/C270	16.6

CIE Flux Codes	98 100 100 100 100
Ra/CRI	>80

LTS

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-R SENSOR
Organic Response sensor for recessed mounting



ZBW 20
honeycomb louvre