




SCELP 401.1030.35



Colours	Article no.	EAN
white	632154	4043544408082
silver	632155	4043544408099
black	632156	4043544408105

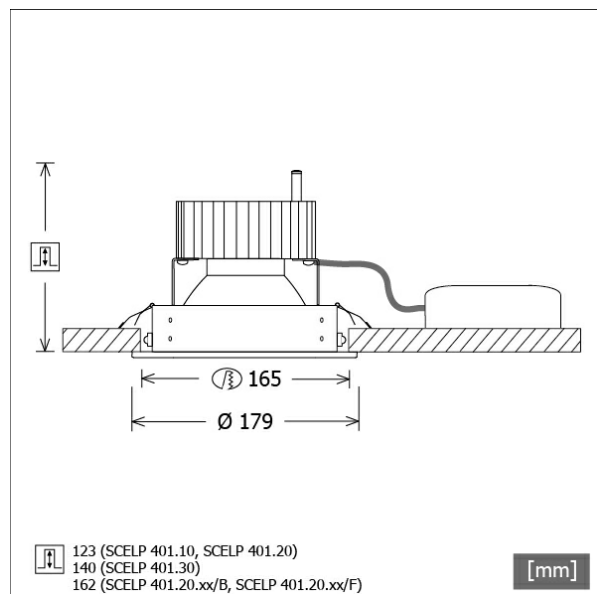

Description

- recessed spotlight with wide range of applications
- light-head pivots through 27° on gimbals
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management with passive cooling (heat sink made from aluminium)
- gimbals made from die-cast zinc
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- recessed ring made from sheet steel
- clear safety glass
- tool-free ceiling mounting via quick-action clamping springs (automatic adjustment of the ceiling thickness)
- luminaire and ballast permanently connected via cable (length: 500 mm), ballast ready for mains connection
- ballast (LED converter) included (external placement)

Standard options



Special options



Lighting data / Norms

Lamps	LED Spot / CRI 80 / 3000 K
EPREL light sources	848117
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	13.4 W
Luminaire luminous flux	1390 lm
System efficiency	103.73 lm/W
Module efficiency	156.64 lm/W
UGR class	≤19
Beam range	Flood
Beam angle	33°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	II
Type of protection	IP20


Dimensions / Weights

Outer diameter	179 mm
Height	127 mm
Cut-out (Ø)	165 mm
Ceiling thickness	10.0 - 30.0 mm
Recessed depth	123 mm
Diameter of light head	140 mm
Net weight	1.05 kg

Recessed Spotlights · Scene 4

SCELP 401.1030.35

Gross weight



LTS
LOVE TO SHINE


1.10 kg

SCELP 401.1030.35

SCELP 401.1030.35

Scene 4 (1xLED 13W 830/3000K 1390lm 35°)

C0/C180 cd / 1000 lm



	C0	C90	C180	C270
0°	2129	2129	2129	2129
15°	1232	1232	1232	1232
30°	397	397	397	397
45°	24	24	24	24
60°	4	4	4	4
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

C0-C180 Plane		
3.0	1.80	328.8
6.0	3.59	82.2
9.0	5.39	36.5
12.0	7.18	20.5
15.0	8.98	13.2

η	LED
Efficiency	107 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	13 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	17.3
UGR C90/C270	17.3
CIE Flux Codes	98 100 100 100 100
Ra/CRI	>80

LTS

Accessories



ZBW20
honeycomb louvre