




ASCL 11.0640.2 DIM



Colours	Article no.	EAN
silver	633714	4043544356161
white	633715	4043544356178

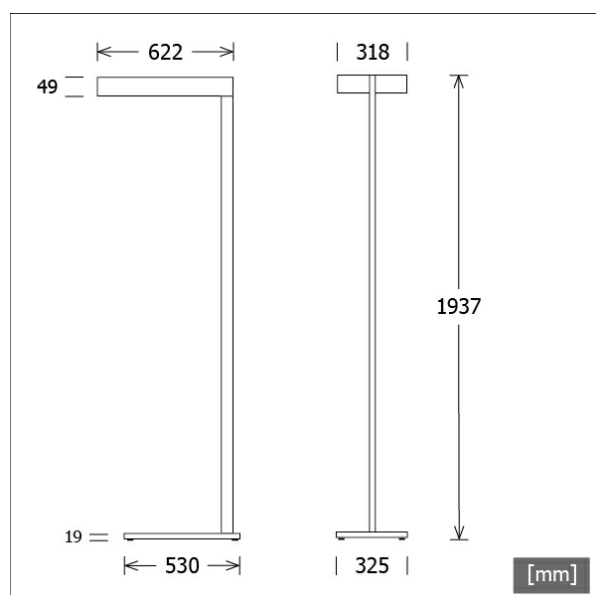

Description

- free-standing luminaire with direct illumination for uniform and glare-free workplace lighting
- no UV and thermal emissions
- twin light-head made from die-cast aluminium
- standard base made from steel St37 (special version ZBB 002 please indicate when ordering)
- rectangular aluminium stand (silver luminaire with silver anodised stand)
- switchDIM with memory function (ON/OFF short pushbutton press, dimming UP/DOWN long pushbutton press)
- diffusers made from prismatic acrylic glass
- central plug connection to mains (length of connecting cable: approx. 3000 mm), silver luminaire / black cable, white luminaire / white cable
- ballast (LED converter) integrated in the stand

Standard options



Lighting data / Norms


Lamps	LED linear / CRI 80 / 4000 K
EPREL light sources	833878
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	50.0 W
Luminaire luminous flux	2960 lm
System efficiency	59.20 lm/W
Module efficiency	185.97 lm/W
UGR class	≤19
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights

Length	622 mm
Width	325 mm
Height	1937 mm
Net weight	17.06 kg
Gross weight	18.26 kg

ASCL 11.0640.2 DIM

Ascona (1xLED 50W 840/4000K 2960lm)




	C0	C90	C180	C270
0°	588	588	588	588
15°	554	557	554	557
30°	416	438	416	438
45°	209	239	209	239
60°	61	60	61	60
75°	29	28	29	28
90°	2	1	2	1
cd / 1000 lm				

Offset [m]	Cone width [m]		Illuminance [lx]
	C0-C180 Plane	C90-C270 Plane	
3.0	4.89	5.32	193.4
6.0	9.78	10.65	48.4
9.0	14.67	15.97	21.5
12.0	19.56	21.30	12.1
15.0	24.45	26.62	7.7

η	LED
Efficiency	59 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	50 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	17.2
UGR C90/C270	17.2
CIE Flux Codes	69 91 97 100 100
Ra/CRI	>80

LTS

Accessories



ZBB 002
luminaire base version 2