




SCER 1.300

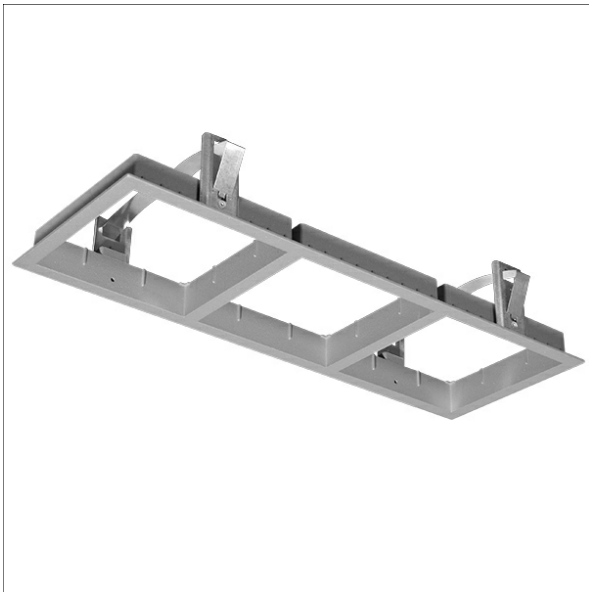

Description

- flexible recessed spotlight system consisting of recessed frame and light-heads inclusive ballasts (light-heads to be ordered separately)
- 3-lamp recessed frame made from die-cast aluminium
- tool-free ceiling mounting via quick-action clamping springs (automatic adjustment of the ceiling thickness)


Notes

installation depth depends on selected spotlight-insert.

Dimensions / Weights

Length	427 mm
Width	151 mm
Height	63 mm
Cut-out (LxW))	416 x 145 mm
Ceiling thickness	1.0 - 25.0 mm
Net weight	0.48 kg
Gross weight	0.60 kg

Colours	Article no.	EAN
silver	628587	4043544266255
white	628588	4043544266262
black	629779	4043544279095

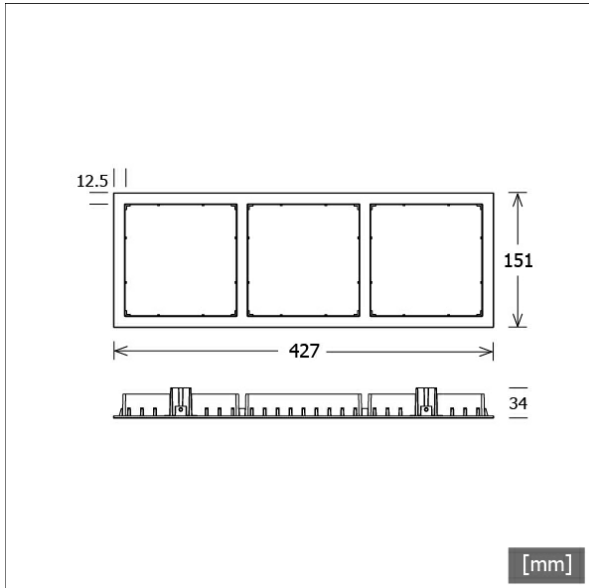

SCER 1.300

Light inserts



Name	Description
SCEKLP 10.1030.15	15°, 3000 K, 125 mm, 13.4 W, 1430 lm
SCEKLP 10.1030.15/DALI	15°, 3000 K, 125 mm, 13.4 W, 1430 lm
SCEKLP 10.1030.25	23°, 3000 K, 125 mm, 13.4 W, 1420 lm
SCEKLP 10.1030.25/DALI	23°, 3000 K, 125 mm, 13.4 W, 1420 lm
SCEKLP 10.1030.35	36°, 3000 K, 125 mm, 13.4 W, 1410 lm
SCEKLP 10.1030.35/DALI	36°, 3000 K, 125 mm, 13.4 W, 1410 lm
SCEKLP 10.1030.50	46°, 3000 K, 125 mm, 13.4 W, 1390 lm
SCEKLP 10.1030.50/DALI	46°, 3000 K, 125 mm, 13.4 W, 1390 lm
SCEKLP 10.1041.15	15°, 4000 K, 125 mm, 13.4 W, 1510 lm
SCEKLP 10.1041.15/DALI	15°, 4000 K, 125 mm, 13.4 W, 1510 lm
SCEKLP 10.1041.25	23°, 4000 K, 125 mm, 13.4 W, 1500 lm
SCEKLP 10.1041.25/DALI	23°, 4000 K, 125 mm, 13.4 W, 1500 lm
SCEKLP 10.1041.35	36°, 4000 K, 125 mm, 13.4 W, 1490 lm
SCEKLP 10.1041.35/DALI	36°, 4000 K, 125 mm, 13.4 W, 1490 lm
SCEKLP 10.1041.50	46°, 4000 K, 125 mm, 13.4 W, 1470 lm
SCEKLP 10.1041.50/DALI	46°, 4000 K, 125 mm, 13.4 W, 1470 lm
SCEKLP 10.2030.15	15°, 3000 K, 125 mm, 25.8 W, 2740 lm
SCEKLP 10.2030.15/DALI	15°, 3000 K, 125 mm, 25.8 W, 2740 lm
SCEKLP 10.2030.25	23°, 3000 K, 125 mm, 25.8 W, 2730 lm
SCEKLP 10.2030.25/DALI	23°, 3000 K, 125 mm, 25.8 W, 2730 lm
SCEKLP 10.2030.35	36°, 3000 K, 125 mm, 25.8 W, 2710 lm
SCEKLP 10.2030.35/DALI	36°, 3000 K, 125 mm, 25.8 W, 2710 lm
SCEKLP 10.2030.50	46°, 3000 K, 125 mm, 25.8 W, 2650 lm
SCEKLP 10.2030.50/DALI	46°, 3000 K, 125 mm, 25.8 W, 2650 lm
SCEKLP 10.2040.15	15°, 4000 K, 125 mm, 25.8 W, 2880 lm
SCEKLP 10.2040.15/DALI	15°, 4000 K, 125 mm, 25.8 W, 2880 lm
SCEKLP 10.2040.25	23°, 4000 K, 125 mm, 25.8 W, 2870 lm

Name	Description
SCEKLP 10.2040.25/DALI	23°, 4000 K, 125 mm, 25.8 W, 2870 lm
SCEKLP 10.2040.35	36°, 4000 K, 125 mm, 25.8 W, 2850 lm
SCEKLP 10.2040.35/DALI	36°, 4000 K, 125 mm, 25.8 W, 2850 lm
SCEKLP 10.2040.50	46°, 4000 K, 125 mm, 25.8 W, 2790 lm
SCEKLP 10.2040.50/DALI	46°, 4000 K, 125 mm, 25.8 W, 2790 lm
SCEKLP 10.3030.15	15°, 3000 K, 125 mm, 32.8 W, 3640 lm
SCEKLP 10.3030.15/DALI	15°, 3000 K, 125 mm, 32.8 W, 3640 lm
SCEKLP 10.3030.25	23°, 3000 K, 125 mm, 32.8 W, 3620 lm
SCEKLP 10.3030.25/DALI	23°, 3000 K, 125 mm, 32.8 W, 3620 lm
SCEKLP 10.3030.35	36°, 3000 K, 125 mm, 32.8 W, 3600 lm
SCEKLP 10.3030.35/DALI	36°, 3000 K, 125 mm, 32.8 W, 3600 lm
SCEKLP 10.3030.50	46°, 3000 K, 125 mm, 32.8 W, 3530 lm
SCEKLP 10.3030.50/DALI	46°, 3000 K, 125 mm, 32.8 W, 3530 lm
SCEKLP 10.3040.15	15°, 4000 K, 125 mm, 32.8 W, 3830 lm
SCEKLP 10.3040.15/DALI	15°, 4000 K, 125 mm, 32.8 W, 3830 lm
SCEKLP 10.3040.25	23°, 4000 K, 125 mm, 32.8 W, 3810 lm
SCEKLP 10.3040.25/DALI	23°, 4000 K, 125 mm, 32.8 W, 3810 lm
SCEKLP 10.3040.35	36°, 4000 K, 125 mm, 32.8 W, 3790 lm
SCEKLP 10.3040.35/DALI	36°, 4000 K, 125 mm, 32.8 W, 3790 lm
SCEKLP 10.3040.50	46°, 4000 K, 125 mm, 32.8 W, 3720 lm
SCEKLP 10.3040.50/DALI	46°, 4000 K, 125 mm, 32.8 W, 3720 lm
SCEKLP 10.20.25/B	18°, 2700 K, 125 mm, 42.0 W, 3980 lm
SCEKLP 10.20.35/B	29°, 2700 K, 125 mm, 42.0 W, 3940 lm
SCEKLP 10.20.50/B	52°, 2700 K, 125 mm, 42.0 W, 3750 lm
SCEKLP 10.20.25/F	18°, 3000 K, 125 mm, 44.0 W, 2300 lm
SCEKLP 10.20.35/F	29°, 3000 K, 125 mm, 44.0 W, 2280 lm

SCER 1.300



Name	Description
SCEKLP 10.20.50/F	52°, 3000 K, 125 mm, 44.0 W , 2170 lm