

SCER 33.111



Description

- flexible recessed spotlight system consisting of recessed housing and light-head inclusive ballast (light-head to be ordered separately)
- 1-lamp recessed frame (round) made from sheet steel
- tool-free ceiling mounting via quick-action clamping springs (automatic adjustment of the ceiling thickness)

Notes

installation depth depends on selected spotlight-insert.


Special options



Dimensions / Weights

Outer diameter	230 mm
Height	85 mm
Cut-out (Ø)	190 mm
Ceiling thickness	5.0 - 30.0 mm
Net weight	0.52 kg
Gross weight	0.54 kg

Colours	Article no.	EAN
black	655245	4043544640130
silver	655246	4043544640147
white	655247	4043544640154

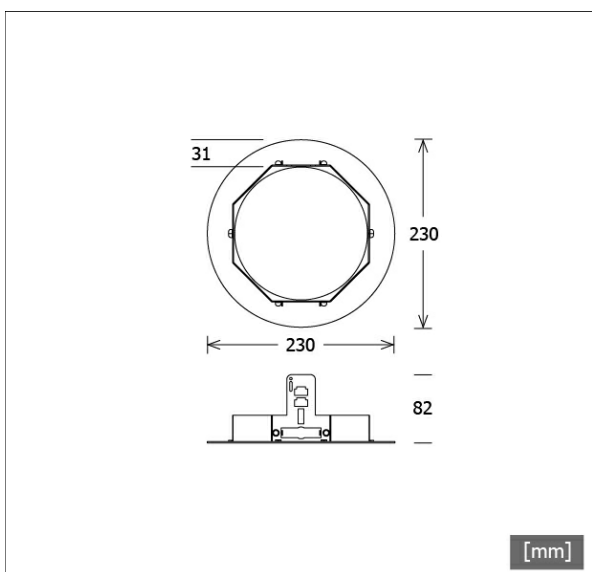

SCER 33.111

Light inserts



Name	Description
SCEKLP 33.2030.15	16°, 3000 K, 25.8 W, 2620 lm
SCEKLP 33.2030.15/DALI	16°, 3000 K, 25.8 W, 2620 lm
SCEKLP 33.2030.25	23°, 3000 K, 25.8 W, 2750 lm
SCEKLP 33.2030.25/DALI	23°, 3000 K, 25.8 W, 2750 lm
SCEKLP 33.2030.35	30°, 3000 K, 25.8 W, 2640 lm
SCEKLP 33.2030.35/DALI	30°, 3000 K, 25.8 W, 2640 lm
SCEKLP 33.2030.55	57°, 3000 K, 25.8 W, 2750 lm
SCEKLP 33.2030.55/DALI	57°, 3000 K, 25.8 W, 2750 lm
SCEKLP 33.2040.15	16°, 4000 K, 25.8 W, 2760 lm
SCEKLP 33.2040.15/DALI	16°, 4000 K, 25.8 W, 2760 lm
SCEKLP 33.2040.25	23°, 4000 K, 25.8 W, 2890 lm
SCEKLP 33.2040.25/DALI	23°, 4000 K, 25.8 W, 2890 lm
SCEKLP 33.2040.35	30°, 4000 K, 25.8 W, 2780 lm
SCEKLP 33.2040.35/DALI	30°, 4000 K, 25.8 W, 2780 lm
SCEKLP 33.2040.55	57°, 4000 K, 25.8 W, 2890 lm
SCEKLP 33.2040.55/DALI	57°, 4000 K, 25.8 W, 2890 lm
SCEKLP 33.3030.15	16°, 3000 K, 32.8 W, 3310 lm
SCEKLP 33.3030.15/DALI	16°, 3000 K, 32.8 W, 3310 lm
SCEKLP 33.3030.25	23°, 3000 K, 32.8 W, 3470 lm
SCEKLP 33.3030.25/DALI	23°, 3000 K, 32.8 W, 3470 lm
SCEKLP 33.3030.35	30°, 3000 K, 32.8 W, 3330 lm

Name	Description
SCEKLP 33.3030.35/DALI	30°, 3000 K, 32.8 W, 3330 lm
SCEKLP 33.3030.55	57°, 3000 K, 32.8 W, 3470 lm
SCEKLP 33.3030.55/DALI	57°, 3000 K, 32.8 W, 3470 lm
SCEKLP 33.3040.15	16°, 4000 K, 32.8 W, 3490 lm
SCEKLP 33.3040.15/DALI	16°, 4000 K, 32.8 W, 3490 lm
SCEKLP 33.3040.25	23°, 4000 K, 32.8 W, 3650 lm
SCEKLP 33.3040.25/DALI	23°, 4000 K, 32.8 W, 3650 lm
SCEKLP 33.3040.35	30°, 4000 K, 32.8 W, 3510 lm
SCEKLP 33.3040.35/DALI	30°, 4000 K, 32.8 W, 3510 lm
SCEKLP 33.3040.55	57°, 4000 K, 32.8 W, 3650 lm
SCEKLP 33.3040.55/DALI	57°, 4000 K, 32.8 W, 3650 lm
SCEKLP 33.20.25/B	22°, 36.1 W, 3520 lm
SCEKLP 33.20.35/B	30°, 36.1 W, 3480 lm
SCEKLP 33.20.55/B	59°, 36.1 W, 3330 lm
SCEKLP 33.5030.15	16°, 3000 K, 52.0 W, 5310 lm
SCEKLP 33.5030.25	23°, 3000 K, 52.0 W, 5580 lm
SCEKLP 33.5030.35	30°, 3000 K, 52.0 W, 5350 lm
SCEKLP 33.5030.55	57°, 3000 K, 52.0 W, 5580 lm
SCEKLP 33.5040.15	16°, 4000 K, 52.0 W, 5580 lm
SCEKLP 33.5040.25	23°, 4000 K, 52.0 W, 5850 lm
SCEKLP 33.5040.35	30°, 4000 K, 52.0 W, 5620 lm
SCEKLP 33.5040.55	57°, 4000 K, 52.0 W, 5850 lm