


SCER 33.300

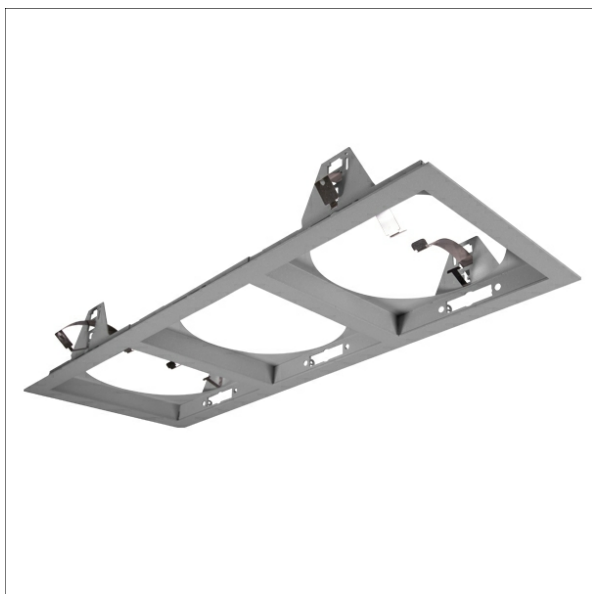

Colours	Article no.	EAN
silver	625775	4043544243461
white	625776	4043544243478
black	644482	4043544510600

Description

- flexible recessed spotlight system consisting of recessed frame and light-heads inclusive ballasts (light-heads to be ordered separately)
- 3-lamp recessed frame (rectangular) made from sheet steel
- tool-free ceiling mounting via quick-action clamping springs (automatic adjustment of the ceiling thickness)

Notes


installation depth depends on selected spotlight-insert.

Special options



Dimensions / Weights

Length	562 mm
Width	200 mm
Height	71 mm
Cut-out (LxW)	540 x 182 mm
Ceiling thickness	5.0 - 30.0 mm
Net weight	1.04 kg
Gross weight	1.40 kg

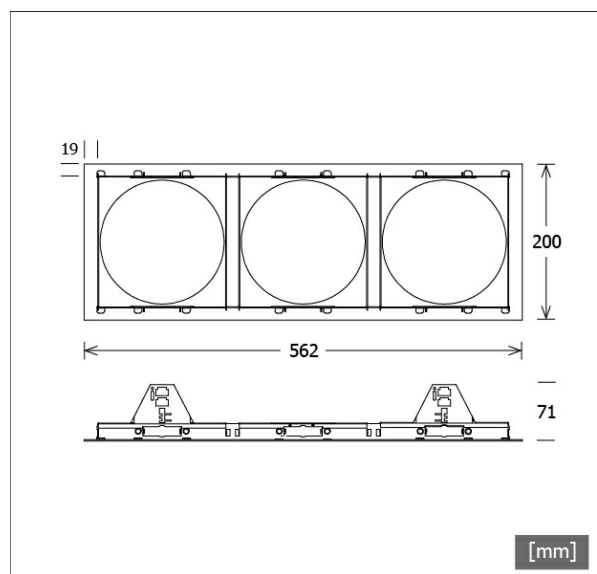

SCER 33.300

Light inserts



Name	Description
SCEKLP 33.2030.15	16°, 3000 K, 25.8 W , 2620 lm
SCEKLP 33.2030.15/DALI	16°, 3000 K, 25.8 W , 2620 lm
SCEKLP 33.2030.25	23°, 3000 K, 25.8 W , 2750 lm
SCEKLP 33.2030.25/DALI	23°, 3000 K, 25.8 W , 2750 lm
SCEKLP 33.2030.35	30°, 3000 K, 25.8 W , 2640 lm
SCEKLP 33.2030.35/DALI	30°, 3000 K, 25.8 W , 2640 lm
SCEKLP 33.2030.55	57°, 3000 K, 25.8 W , 2750 lm
SCEKLP 33.2030.55/DALI	57°, 3000 K, 25.8 W , 2750 lm
SCEKLP 33.2040.15	16°, 4000 K, 25.8 W , 2760 lm
SCEKLP 33.2040.15/DALI	16°, 4000 K, 25.8 W , 2760 lm
SCEKLP 33.2040.25	23°, 4000 K, 25.8 W , 2890 lm
SCEKLP 33.2040.25/DALI	23°, 4000 K, 25.8 W , 2890 lm
SCEKLP 33.2040.35	30°, 4000 K, 25.8 W , 2780 lm
SCEKLP 33.2040.35/DALI	30°, 4000 K, 25.8 W , 2780 lm
SCEKLP 33.2040.55	57°, 4000 K, 25.8 W , 2890 lm
SCEKLP 33.2040.55/DALI	57°, 4000 K, 25.8 W , 2890 lm
SCEKLP 33.3030.15	16°, 3000 K, 32.8 W , 3310 lm
SCEKLP 33.3030.15/DALI	16°, 3000 K, 32.8 W , 3310 lm
SCEKLP 33.3030.25	23°, 3000 K, 32.8 W , 3470 lm
SCEKLP 33.3030.25/DALI	23°, 3000 K, 32.8 W , 3470 lm
SCEKLP 33.3030.35	30°, 3000 K, 32.8 W , 3330 lm

Name	Description
SCEKLP 33.3030.35/DALI	30°, 3000 K, 32.8 W , 3330 lm
SCEKLP 33.3030.55	57°, 3000 K, 32.8 W , 3470 lm
SCEKLP 33.3030.55/DALI	57°, 3000 K, 32.8 W , 3470 lm
SCEKLP 33.3040.15	16°, 4000 K, 32.8 W , 3490 lm
SCEKLP 33.3040.15/DALI	16°, 4000 K, 32.8 W , 3490 lm
SCEKLP 33.3040.25	23°, 4000 K, 32.8 W , 3650 lm
SCEKLP 33.3040.25/DALI	23°, 4000 K, 32.8 W , 3650 lm
SCEKLP 33.3040.35	30°, 4000 K, 32.8 W , 3510 lm
SCEKLP 33.3040.35/DALI	30°, 4000 K, 32.8 W , 3510 lm
SCEKLP 33.3040.55	57°, 4000 K, 32.8 W , 3650 lm
SCEKLP 33.3040.55/DALI	57°, 4000 K, 32.8 W , 3650 lm
SCEKLP 33.20.25/B	22°, 36.1 W , 3520 lm
SCEKLP 33.20.35/B	30°, 36.1 W , 3480 lm
SCEKLP 33.20.55/B	59°, 36.1 W , 3330 lm
SCEKLP 33.5030.15	16°, 3000 K, 52.0 W , 5310 lm
SCEKLP 33.5030.25	23°, 3000 K, 52.0 W , 5580 lm
SCEKLP 33.5030.35	30°, 3000 K, 52.0 W , 5350 lm
SCEKLP 33.5030.55	57°, 3000 K, 52.0 W , 5580 lm
SCEKLP 33.5040.15	16°, 4000 K, 52.0 W , 5580 lm
SCEKLP 33.5040.25	23°, 4000 K, 52.0 W , 5850 lm
SCEKLP 33.5040.35	30°, 4000 K, 52.0 W , 5620 lm
SCEKLP 33.5040.55	57°, 4000 K, 52.0 W , 5850 lm