


SCER 6.300

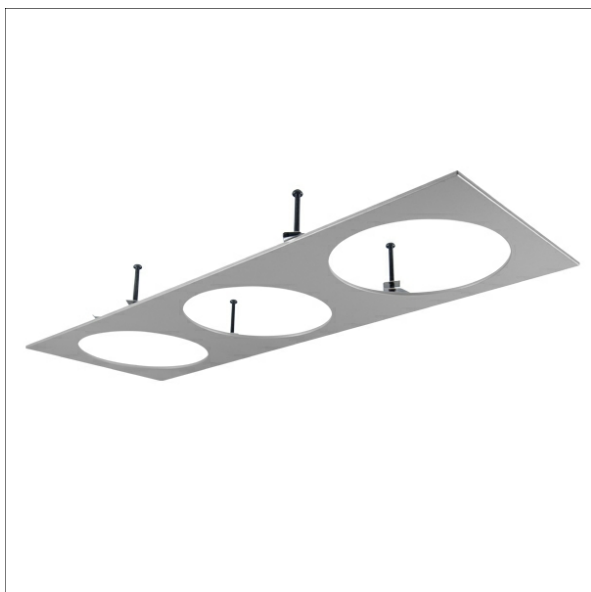

Description

- flexible recessed spotlight system consisting of recessed frame and light-heads inclusive ballasts (light-heads to be ordered separately)
- 3-lamp recessed frame (rectangular) made from sheet steel
- tool-free ceiling mounting via quick-action clamping springs (automatic adjustment of the ceiling thickness)

Notes

installation depth depends on selected spotlight-insert.


Special options



Dimensions / Weights

Length	570 mm
Width	190 mm
Height	109 mm
Cut-out (LxW)	545 x 165 mm
Ceiling thickness	2.0 - 50.0 mm
Net weight	1.44 kg
Gross weight	1.74 kg

Colours	Article no.	EAN
silver	616249	4043544122452
white	623408	4043544485212
black	645561	4043544518729

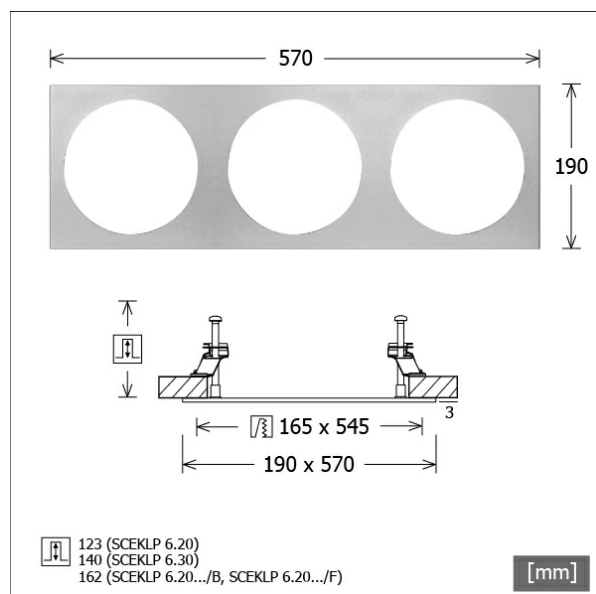

SCER 6.300

Light inserts



Name	Description
SCEKLP 6.2030.15	14°, 3000 K, 25.8 W , 2710 lm
SCEKLP 6.2030.15/DALI	14°, 3000 K, 25.8 W , 2710 lm
SCEKLP 6.2030.25	27°, 3000 K, 25.8 W , 2700 lm
SCEKLP 6.2030.25/DALI	27°, 3000 K, 25.8 W , 2700 lm
SCEKLP 6.2030.35	33°, 3000 K, 25.8 W , 2680 lm
SCEKLP 6.2030.35/DALI	33°, 3000 K, 25.8 W , 2680 lm
SCEKLP 6.2030.45	49°, 3000 K, 25.8 W , 2650 lm
SCEKLP 6.2030.45/DALI	49°, 3000 K, 25.8 W , 2650 lm
SCEKLP 6.2040.15	14°, 4000 K, 25.8 W , 2850 lm
SCEKLP 6.2040.15/DALI	14°, 4000 K, 25.8 W , 2850 lm
SCEKLP 6.2040.25	27°, 4000 K, 25.8 W , 2840 lm
SCEKLP 6.2040.25/DALI	27°, 4000 K, 25.8 W , 2840 lm
SCEKLP 6.2040.35	33°, 4000 K, 25.8 W , 2820 lm
SCEKLP 6.2040.35/DALI	33°, 4000 K, 25.8 W , 2820 lm
SCEKLP 6.2040.45	49°, 4000 K, 25.8 W , 2790 lm
SCEKLP 6.2040.45/DALI	49°, 4000 K, 25.8 W , 2790 lm
SCEKLP 6.3030.15	14°, 3000 K, 32.8 W , 3600 lm
SCEKLP 6.3030.15/DALI	14°, 3000 K, 32.8 W , 3600 lm
SCEKLP 6.3030.25	27°, 3000 K, 32.8 W , 3580 lm

Name	Description
SCEKLP 6.3030.25/DALI	27°, 3000 K, 32.8 W , 3580 lm
SCEKLP 6.3030.35	33°, 3000 K, 32.8 W , 3560 lm
SCEKLP 6.3030.35/DALI	33°, 3000 K, 32.8 W , 3560 lm
SCEKLP 6.3030.45	49°, 3000 K, 32.8 W , 3530 lm
SCEKLP 6.3030.45/DALI	49°, 3000 K, 32.8 W , 3530 lm
SCEKLP 6.3040.15	14°, 4000 K, 32.8 W , 3780 lm
SCEKLP 6.3040.15/DALI	14°, 4000 K, 32.8 W , 3780 lm
SCEKLP 6.3040.25	27°, 4000 K, 32.8 W , 3760 lm
SCEKLP 6.3040.25/DALI	27°, 4000 K, 32.8 W , 3760 lm
SCEKLP 6.3040.35	33°, 4000 K, 32.8 W , 3740 lm
SCEKLP 6.3040.35/DALI	33°, 4000 K, 32.8 W , 3740 lm
SCEKLP 6.3040.45	49°, 4000 K, 32.8 W , 3710 lm
SCEKLP 6.3040.45/DALI	49°, 4000 K, 32.8 W , 3710 lm
SCEKLP 6.20.25/B	26°, 2700 K, 42.0 W , 4200 lm
SCEKLP 6.20.35/B	35°, 2700 K, 42.0 W , 4010 lm
SCEKLP 6.20.45/B	50°, 2700 K, 42.0 W , 3970 lm
SCEKLP 6.20.25/F	26°, 3000 K, 44.0 W , 2260 lm
SCEKLP 6.20.35/F	35°, 3000 K, 44.0 W , 2160 lm
SCEKLP 6.20.45/F	49°, 3000 K, 44.0 W , 2090 lm