



SCOUT 202.927.50.2/DALI-EU



Colours	Article no.	EAN
silver	660382	4043544692016
black	660383	4043544692023
white	660384	4043544692030

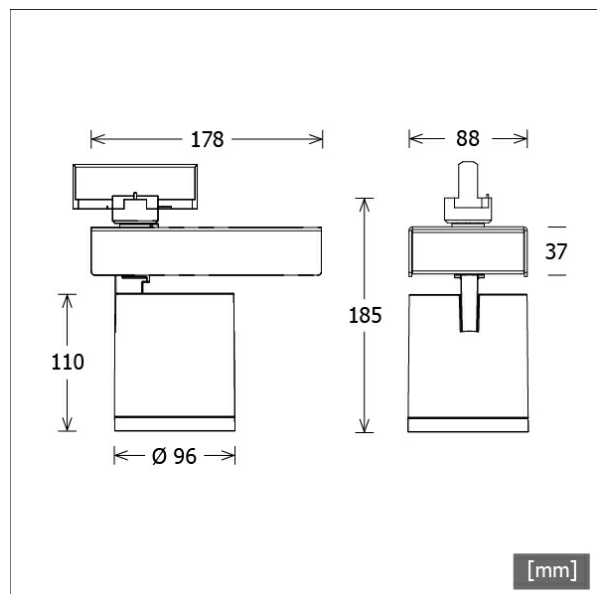

Description

- flexible track-mounted spotlight in separated design with cylindrical light-head
- light-head rotates through 355° and pivots through 90° via integrated articulated arm
- outstanding ease of maintenance
- no UV and thermal emissions
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- high performance specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- ballast housing made from aluminium
- clear and reflection-free EnergyVision safety glass
- 3-phase track adapter DALI (Eutrac)
- ballast (LED converter DALI, dimmable) integrated

Standard options



Special options



Lighting data / Norms


Lamps	LED Spot / CRI 90 / 2700 K
EPREL light sources	857619
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	21.0 W
Luminaire luminous flux	2080 lm
System efficiency	99.04 lm/W
Module efficiency	132.86 lm/W
UGR class	≤19
Beam range	Wide Flood
Beam angle	51°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights


Length	178 mm
Width	96 mm
Height	185 mm
Diameter of light head	96 mm
Net weight	1.30 kg
Gross weight	1.37 kg

SCOUT 202.927.50.2/DALI-EU

Scout Next (1xLED 21W 927/2700K 2080lm 50°)

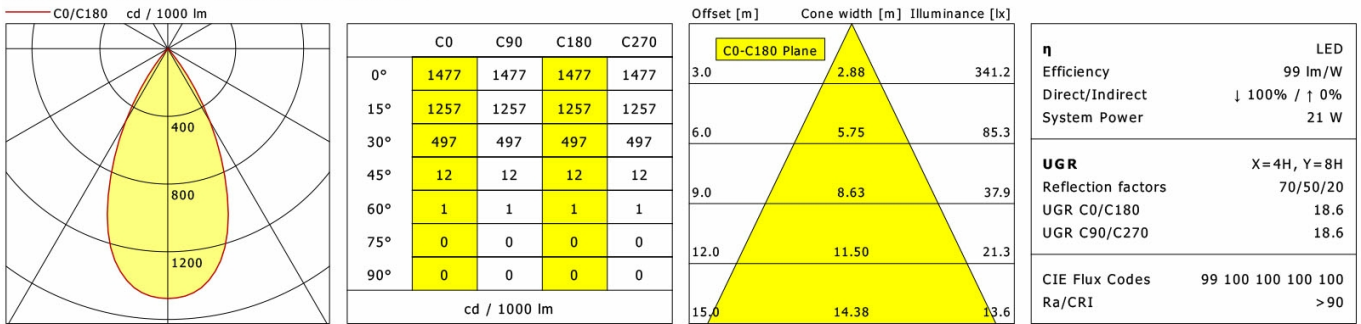

Offset [m] Cone width [m] Illuminance [lx]



η

Efficiency LED 99 lm/W

Direct/Indirect ↓ 100% / ↑ 0%

System Power 21 W

UGR X=4H, Y=8H

Reflection factors 70/50/20

UGR C0/C180 18.6

UGR C90/C270 18.6

CIE Flux Codes 99 100 100 100 100

Ra/CRI >90

LTS

Accessories



ZBK 13
anti-glare flaps



ZBW 87
honeycomb louvre