

SCOUT 202.930.25.2/DALI-EU



Colours	Article no.	EAN
silver	660388	4043544692078
black	660389	4043544692085
white	660390	4043544692092

Description

- flexible track-mounted spotlight in separated design with cylindrical light-head
- light-head rotates through 355° and pivots through 90° via integrated articulated arm
- outstanding ease of maintenance
- no UV and thermal emissions
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- high performance specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- ballast housing made from aluminium
- clear and reflection-free EnergyVision safety glass
- 3-phase track adapter DALI (Eutrac)
- ballast (LED converter DALI, dimmable) integrated

Standard options



Special options






Lighting data / Norms

Lamps	LED Spot / CRI 90 / 3000 K
EPREL light sources	860292
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	21.0 W
Luminaire luminous flux	2390 lm
System efficiency	113.80 lm/W
Module efficiency	138.73 lm/W
UGR class	≤19
Beam range	Medium Flood
Beam angle	26°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20


Dimensions / Weights

Length	178 mm
Width	96 mm
Height	185 mm
Diameter of light head	96 mm
Net weight	1.30 kg
Gross weight	1.37 kg

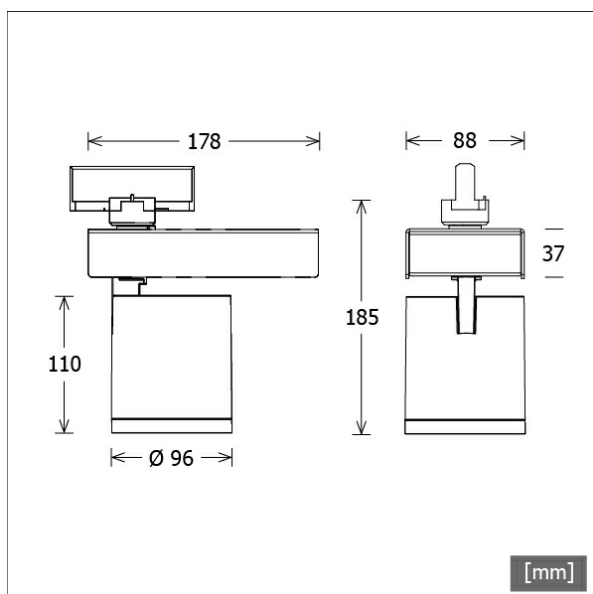

SCOUT 202.930.25.2/DALI-EU

Scout Next (1xLED 21W 930/3000K 2390lm 25°)

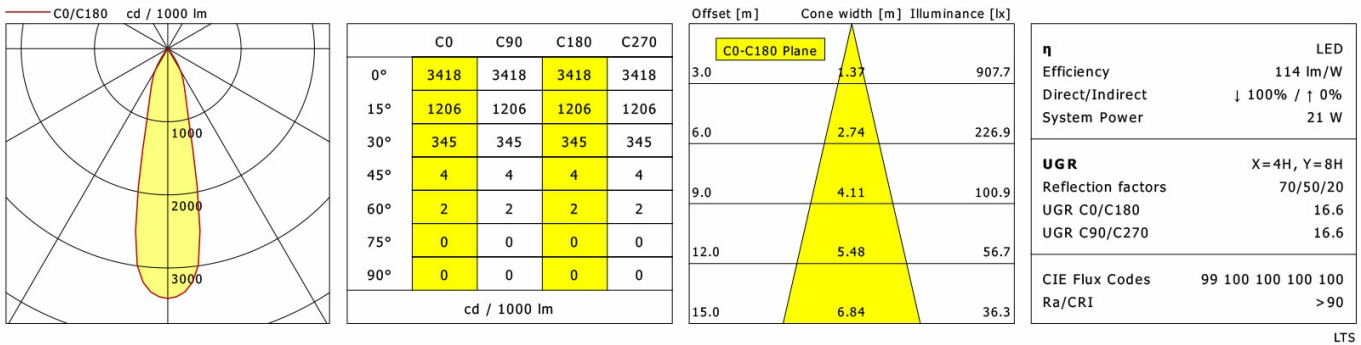

Offset [m] Cone width [m] Illuminance [lx]

C0-C180 Plane

3.0	1.37	907.7
6.0	2.74	226.9
9.0	4.11	100.9
12.0	5.48	56.7
15.0	6.84	36.3

η

Efficiency LED 114 lm/W

Direct/Indirect ↓ 100% / ↑ 0%

System Power 21 W

UGR X=4H, Y=8H

Reflection factors 70/50/20

UGR C0/C180 16.6

UGR C90/C270 16.6

CIE Flux Codes 99 100 100 100 100

Ra/CRI >90

Accessories



ZBK 13
anti-glare flaps



ZBW 87
honeycomb louvre