


SCOUT 202.940.35.2/DALI-EU



Colours	Article no.	EAN
silver	660430	4043544692498
black	660431	4043544692504
white	660432	4043544692511

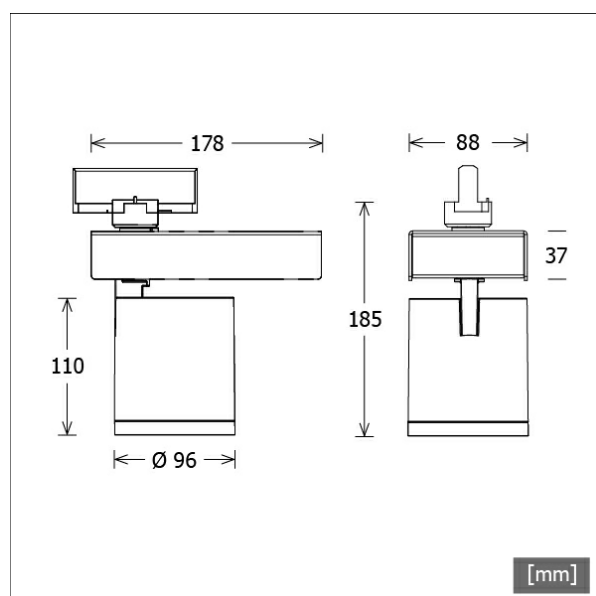

Description

- flexible track-mounted spotlight in separated design with cylindrical light-head
- light-head rotates through 355° and pivots through 90° via integrated articulated arm
- outstanding ease of maintenance
- no UV and thermal emissions
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- high performance specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- ballast housing made from aluminium
- clear and reflection-free EnergyVision safety glass
- 3-phase track adapter DALI (Eutrac)
- ballast (LED converter DALI, dimmable) integrated

Standard options



Special options



Lighting data / Norms


Lamps	LED Spot / CRI 90 / 4000 K
EPREL light sources	848115
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	21.0 W
Luminaire luminous flux	2430 lm
System efficiency	115.71 lm/W
Module efficiency	145.64 lm/W
UGR class	≤19
Beam range	Flood
Beam angle	36°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights

Length	178 mm
Width	96 mm
Height	185 mm
Diameter of light head	96 mm
Net weight	1.30 kg
Gross weight	1.37 kg

SCOUT 202.940.35.2/DALI-EU

Scout Next (1xLED 21W 940/4000K 2430lm 35°)

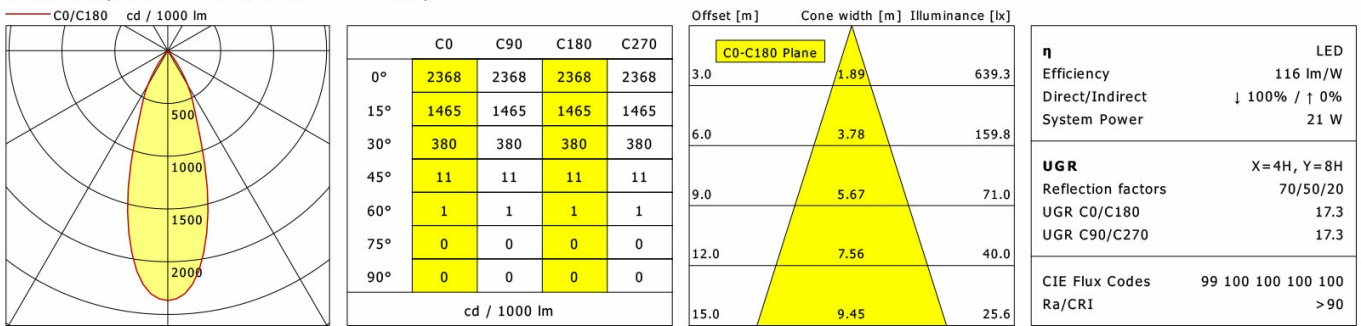

LTS

Accessories



ZBK 13
anti-glare flaps



ZBW 87
honeycomb louvre