




SCOUT 203.930.35.2/DALI-EU



Colours	Article no.	EAN
silver	660466	4043544692856
black	660467	4043544692863
white	660468	4043544692870

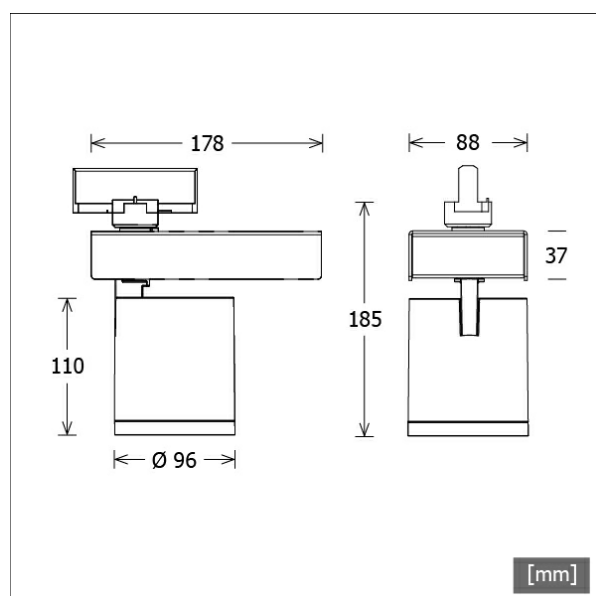

Description

- flexible track-mounted spotlight in separated design with cylindrical light-head
- light-head rotates through 355° and pivots through 90° via integrated articulated arm
- outstanding ease of maintenance
- no UV and thermal emissions
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- high performance specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- ballast housing made from aluminium
- clear and reflection-free EnergyVision safety glass
- 3-phase track adapter DALI (Eutrac)
- ballast (LED converter DALI, dimmable) integrated

Standard options



Special options



Lighting data / Norms


Lamps	LED Spot / CRI 90 / 3000 K
EPREL light sources	860292
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	29.2 W
Luminaire luminous flux	3170 lm
System efficiency	108.56 lm/W
Module efficiency	138.73 lm/W
UGR class	≤19
Beam range	Flood
Beam angle	36°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights

Length	178 mm
Width	96 mm
Height	185 mm
Diameter of light head	96 mm
Net weight	1.25 kg
Gross weight	1.34 kg

SCOUT 203.930.35.2/DALI-EU

Scout Next (1xLED 29W 930/3000K 3170lm 35°)

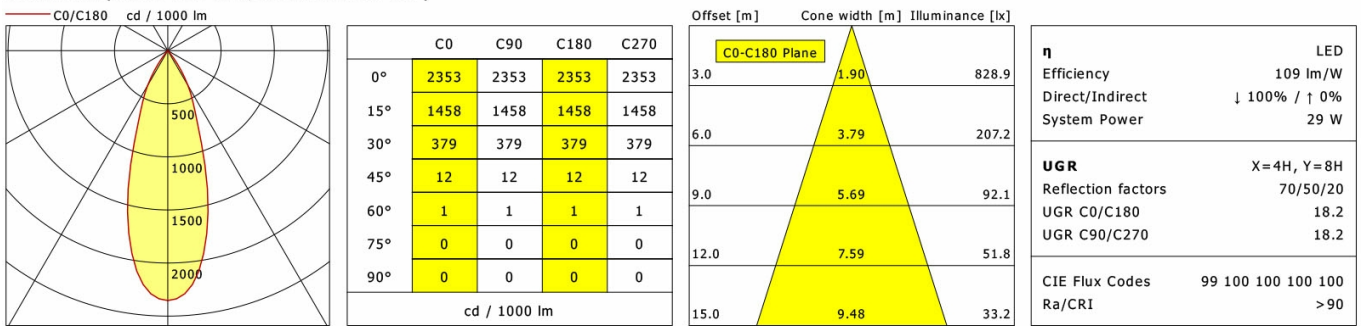

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	1.90	828.9
6.0	3.79	207.2
9.0	5.69	92.1
12.0	7.59	51.8
15.0	9.48	33.2

C0-C180 Plane

η	LED
Efficiency	109 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	29 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.2
UGR C90/C270	18.2
CIE Flux Codes	99 100 100 100 100
Ra/CRI	>90

LTS

Accessories



ZBK 13
anti-glare flaps



ZBW 87
honeycomb louvre