


## SCOUT 204.930.OV46/DALI-ST



Colours	Article no.	EAN
silver	664710	4043544738462
black	664711	4043544738479
white	664712	4043544738486

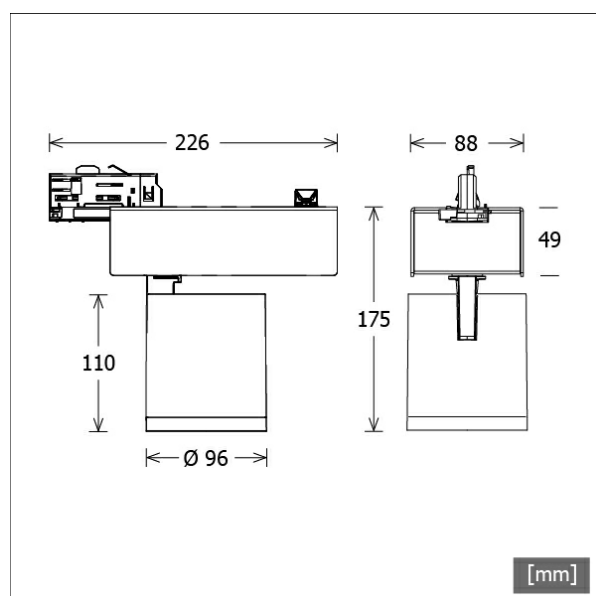

## Description

- flexible track-mounted spotlight in separated design with cylindrical light-head
- oval reflector 40°/60° for special counter, wall and accent lighting
- light-head rotates through 355° and pivots through 90° via integrated articulated arm
- outstanding ease of maintenance
- no UV and thermal emissions
- light-head made from die-cast aluminium
- innovative thermal management with design-integrated passive cooling
- high performance specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- ballast housing made from aluminium
- clear and reflection-free EnergyVision safety glass
- 3-phase track adapter DALI (ONETrack)
- ballast (LED converter DALI, dimmable) integrated

## Standard options



## Special options



## Lighting data / Norms

Lamps	LED Spot / CRI 90 / 3000 K
EPREL light sources	860292
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	37.5 W
Luminaire luminous flux	4060 lm
System efficiency	108.26 lm/W
Module efficiency	138.73 lm/W
UGR class	≤25
Beam range	Oval
Beam angle	Oval 40/60
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20


## Dimensions / Weights

Length	226 mm
Width	96 mm
Height	175 mm
Diameter of light head	96 mm
Net weight	1.27 kg
Gross weight	1.34 kg

# SCOUT 204.930.OV46/DALI-ST

## SCOUT 204.930.OV46/DALI-ST

Scout Next (1xLED 38W 930/3000K 4060lm)



	C0	C90	C180	C270
0°	1506	1506	1506	1506
15°	1426	1067	1426	1067
30°	881	353	881	353
45°	15	5	15	5
60°	2	2	2	2
75°	1	1	1	1
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	3.98   2.24	679.4
6.0	7.36   4.49	169.9
9.0	11.04   6.73	75.5
12.0	14.72   8.97	42.5
15.0	18.40   11.22	27.2

<b>η</b>	LED
Efficiency	107 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	38 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	23.9
UGR C90/C270	18.7
CIE Flux Codes	99 100 100 100 100
Ra/CRI	>90

LTS

## Accessories



**ST-A 10/9000A-1-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 1000 mm)



**ST-A 20/9000A-2-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 2000 mm)



**ST-A 30/9000A-3-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 3000 mm)



**ST-A 40/9000A-4-ST**  
 surface-mounted track ONETrack Advance with data bus  
 (length: 4000 mm)



**ST-E 10/9000-1-R**  
 recessed track ONETrack with data bus  
 (length: 1000 mm)



**ST-E 20/9000-2-R**  
 recessed track ONETrack with data bus  
 (length: 2000 mm)



**ST-E 30/9000-3-R**  
 recessed track ONETrack with data bus  
 (length: 3000 mm)



**ST-E 40/9000-4-R**  
 recessed track ONETrack with data bus  
 (length: 4000 mm)



**ZB-OR DONGLE**  
 Organic Response IR dongle kit



**ZB-OR GATEWAY**  
 Organic Response IoT Gateway Cascade Series



**ZB-OR-T SENSOR**  
 Organic Response sensor for track mounting