




SKIL-P 310.830.1/DALI



Colours	Article no.	EAN
silver	667456	4043544767714
black	667457	4043544767721
white	667458	4043544767738

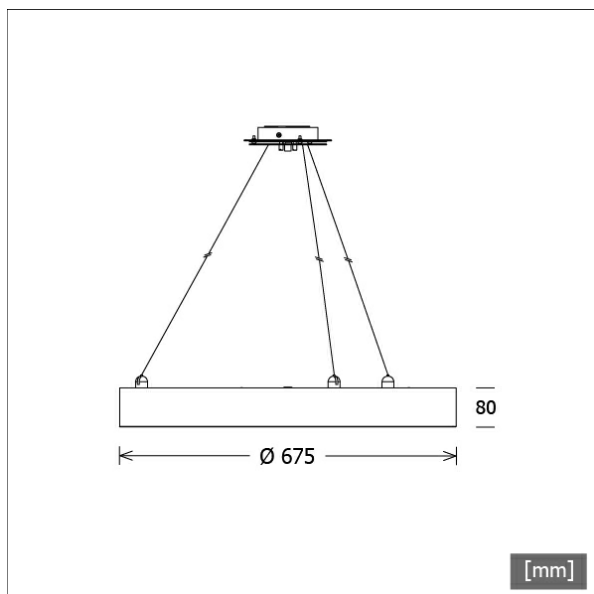

Description

- flat dimmable pendant luminaire with DALI technology in circular design for homogeneous direct-indirect illumination and sophisticated architectural lighting
- indirect light component can be controlled separately
- outstanding ease of maintenance
- no UV and thermal emissions
- high-quality sheet steel housing
- opal acrylic glass pane
- wire-rope suspension 3-fold with height adjustment (length: 3000 mm)
- transparent connecting cable (5-core, pre-fabricated), ceiling canopy made from aluminium in the same colour as the luminaire
- ballast (LED converter) integrated (with DALI dimming)

Standard options



Special options



Lighting data / Norms


Lamps	LED linear / CRI 80 / 3000 K
EPREL light sources	993702 993704 833894
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	99.9 W
Luminaire luminous flux	10570 lm
System efficiency	105.80 lm/W
Module efficiency	167.82 lm/W
UGR class	≤22
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights

Outer diameter	675 mm
Height	80 mm
Net weight	11.78 kg
Gross weight	12.52 kg

SKIL-P 310.830.1/DALI

Skive Large | Pendel (1xLED 100W 830/3000K 10570lm)



	C0	C90	C180	C270
0°	242	242	242	242
30°	209	209	209	209
60°	112	113	112	113
90°	1	1	1	1
120°	44	44	44	44
150°	89	89	89	89
180°	100	100	100	100
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	106 lm/W
Direct/Indirect	↓ 71% / ↑ 29%
System Power	100 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	21.0
UGR C90/C270	21.0
CIE Flux Codes	47 79 96 71 100
Ra/CRI	>80

LTS

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
Organic Response sensor for surface mounting



ZB-OR-P SENSOR/3000
Organic Response sensor for pendant mounting