


SKIM-P 303.830.1/DALI



Colours	Article no.	EAN
silver	667450	4043544767653
black	667451	4043544767660
white	667452	4043544767677

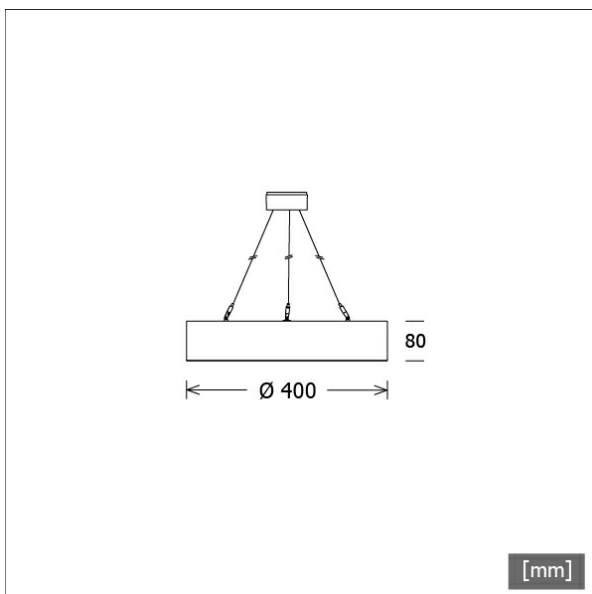

Description

- flat dimmable pendant luminaire with DALI technology in circular design for homogeneous direct-indirect illumination and sophisticated architectural lighting
- indirect light component can be controlled separately
- outstanding ease of maintenance
- no UV and thermal emissions
- high-quality sheet steel housing
- opal acrylic glass pane
- wire-rope suspension 3-fold with height adjustment (length: 3000 mm)
- transparent connecting cable (5-core, pre-fabricated), ceiling box made from ABS in the same colour as the luminaire
- ballast (LED converter) integrated (with DALI dimming)

Standard options



Special options



Lighting data / Norms


Lamps	LED linear / CRI 80 / 3000 K
EPREL light sources	993702 833889
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	
System power	38.8 W
Luminaire luminous flux	3690 lm
System efficiency	95.10 lm/W
Module efficiency	172.26 lm/W
UGR class	≤25
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights

Outer diameter	400 mm
Height	80 mm
Net weight	5.44 kg
Gross weight	5.73 kg

SKIM-P 303.830.1/DALI

Skive Medium | Pendel (1xLED 39W 830/3000K 3690lm)



	C0	C90	C180	C270
0°	243	243	243	243
30°	208	208	208	208
60°	111	111	111	111
90°	1	1	1	1
120°	45	45	45	45
150°	89	89	89	89
180°	103	103	103	103
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	95 lm/W
Direct/Indirect	↓ 71% / ↑ 29%
System Power	39 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	23.0
UGR C90/C270	23.0
CIE Flux Codes	47 79 96 71 100
Ra/CRI	>80

LTS

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
Organic Response sensor for surface mounting



ZB-OR-P SENSOR/3000
Organic Response sensor for pendant mounting