


SKIXL-P 324.840.1/DALI



Colours	Article no.	EAN
silver	667465	4043544767806
black	667466	4043544767813
white	667467	4043544767820

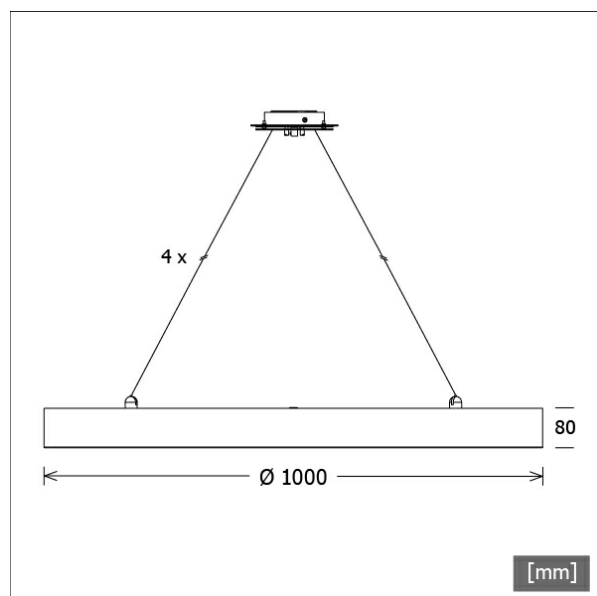

Description

- flat dimmable pendant luminaire with DALI technology in circular design for homogeneous direct-indirect illumination and sophisticated architectural lighting
- indirect light component can be controlled separately
- outstanding ease of maintenance
- no UV and thermal emissions
- high-quality sheet steel housing
- opal acrylic glass pane
- wire-rope suspension 4-fold with height adjustment (length: 3000 mm)
- transparent connecting cable (5-core, pre-fabricated), ceiling canopy made from aluminium in the same colour as the luminaire
- ballast (LED converter) integrated (with DALI dimming)

Standard options



Special options



Lighting data / Norms


Lamps	LED linear / CRI 80 / 4000 K
EPREL light sources	993701 993703 833895
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	211.5 W
Luminaire luminous flux	25390 lm
System efficiency	120.04 lm/W
Module efficiency	179.05 lm/W
UGR class	≤22
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights

Outer diameter	1000 mm
Height	80 mm
Net weight	23.57 kg
Gross weight	24.81 kg

SKIXL-P 324.840.1/DALI

Skive XLarge | Pendel (1xLED 212W 840/4000K 25390lm)



	C0	C90	C180	C270
0°	257	257	257	257
30°	220	221	220	221
60°	118	118	118	118
90°	0	0	0	0
120°	39	38	39	38
150°	76	77	76	77
180°	89	89	89	89
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	120 lm/W
Direct/Indirect	↓ 75% / ↑ 25%
System Power	212 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	21.7
UGR C90/C270	21.7
CIE Flux Codes	47 79 96 75 100
Ra/CRI	>80

LTS

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
Organic Response sensor for surface mounting



ZB-OR-P SENSOR/3000
Organic Response sensor for pendant mounting