

ST-E 40/9000-4-R




Colours	Article no.	EAN
black	660325	4043544691453
white	660326	4043544691460
grey	660327	4043544691477

Description

- recessed track with data bus (length: 4000 mm)
- also suitable for 3-phase track adapters without bus function
- realisation of lighting tasks with DALI technology
- 6-conductor track with three separately controllable current circuits
- extruded aluminium profile which also functions as earth
- length can be adjusted on site by easily shortening the track (cutting tool ST-ZCUT/S-9000/T-N required for shortening the copper conductors)
- mechanical load diagramm see additional data sheet
- max. electrical load: AC mains power supply 3.6 kVA, 3-phase network 3 x 3.6 kVA = 10.8 kVA
- rated current and voltage: 16 A / 440 V (1 A / 50 V AC FELV)
- system components to be ordered separately

Dimensions / Weights

Length	4000 mm
Width	52 mm
Height	38 mm
Cut-out (LxW)	4006 x 34 mm
Recessed depth	35 mm
Net weight	4.55 kg
Gross weight	4.75 kg

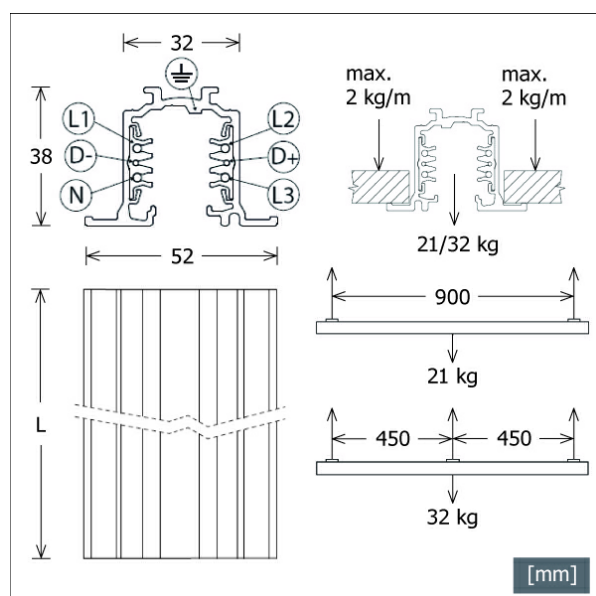

ST-E 40/9000-4-R

Accessories



LA 30 SA-NORDIC
3-phase track adapter for wire-rope suspension



ST-E CAP/9004-R
end cover for recessed track



ST-E F/PE-L/9002
end feed-in with polarity left



ST-E F/PE-R/9001
end feed-in with polarity right



ST-E I/9010
electric linear connector



ST-E L/PE-IN/9011
L-connector with polarity inside



ST-E L/PE-OUT/9012
L-connector with polarity outside



ST-E S/S-9000-313
pendant bracket for rope suspensions



ST-IE/9003
electric linear connector
(inside)



ST-IM/S-9000-322-LA
mechanical coupler
(outside)



ST-ZLA 30
3-phase track adapter



ST-ZLA 30 M10
3-phase track adapter with thread nipple M10

ST-E 40/9000-4-R

Accessories



ST-ZLA 30 M13
3-phase track adapter with thread nipple M13



ST-ZLAB 30 M13
3-phase track bus adapter with thread nipple M13



ST-ZCOV/S-9000/GP
cover strip



ST-ZCUT/S-9000/T-N
cutting tool



ST-ZSCHUKO/4230V
socket adapter for 3-phase track