

TIBI-P 400.1940/DALI



Description

- pendant luminaire in superellip shape for homogeneous direct-indirect lighting and with uniformly round light distribution
- available with decorative ring in brushed or black aluminium
- decorative ring and cover of ceiling canopy in the same colour
- outstanding ease of maintenance
- no UV and thermal emissions
- luminaire body made of shiny opal acrylic glass
- conical ceiling canopy with magnetic attachment (without visible screws)
- white 5-core textile cable
- 3-fold wire-rope suspension with height-adjustment (length: 2500 mm)
- ceiling canopy for screw mounting
- 5-pole terminal block
- ballast (LED converter DALI, dimmable) integrated in the luminaire

Lighting data / Norms




Lamps	LED Modul / CRI 80 / 4000 K
Lifetime	L100 B50 100.000 h
System power	17.0 W
Luminaire luminous flux	1790 lm
System efficiency	105.29 lm/W
UGR class	≤16
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights

Outer diameter	400 mm
Height	138 mm
Net weight	3.30 kg
Gross weight	3.47 kg



Colours	Article no.	EAN
alu	649115	7320046219079
black	649116	7320046219086

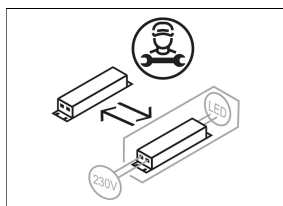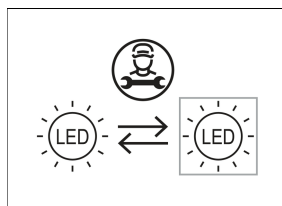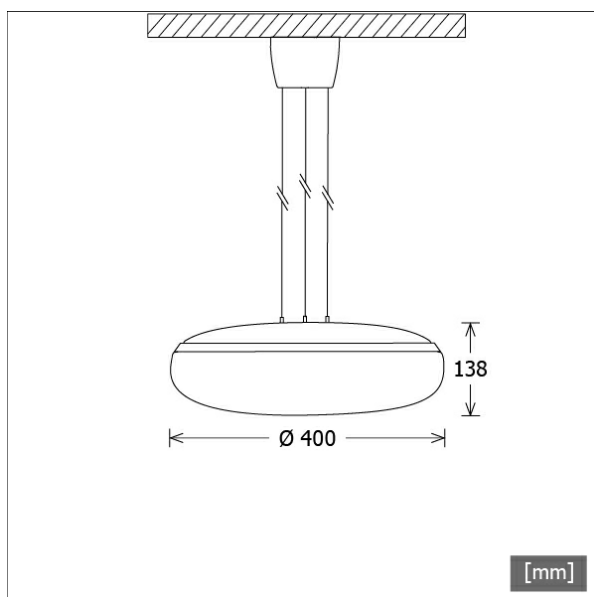


TIBI-P 400.1940/DALI

TIBI-P 400.1940/DALI

Tibi | Pendant (1xLED 17W 840/4000K 1790lm)

C0/C180 cd / 1000 lm



	C0	C90	C180	C270
0°	168	168	168	168
30°	144	144	144	144
60°	83	83	83	83
90°	28	28	28	28
120°	71	71	71	71
150°	112	112	112	112
180°	93	93	93	93
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	105 lm/W
Direct/Indirect	↓ 55% / ↑ 45%
System Power	17 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	14.5
UGR C90/C270	14.5
CIE Flux Codes	42 71 90 55 100
Ra/CRI	>80

LTS

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
Organic Response sensor for surface mounting



ZB-OR-P SENSOR/3000
Organic Response sensor for pendant mounting