




TORL 201.827.40.2




Colours	Article no.	EAN
black	657702	4043544666079
silver	657703	4043544666086
white	657704	4043544666093

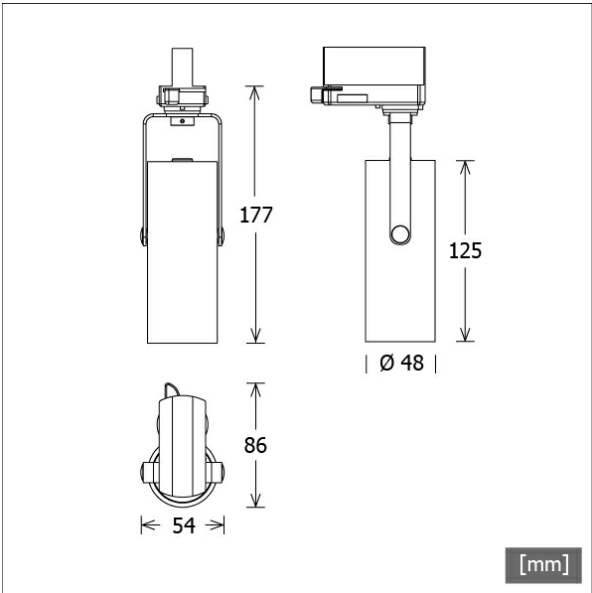

Description

- flexible track-mounted mini spotlight in compact cylindrical design
- luminaire rotates through 350° and pivots through 180° via U-bracket
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management via housing
- high-tech reflector lense made from PMMA for high luminous efficiency and glare-free lighting
- housing cylinder and U-bracket made from aluminium
- 3-phase track adapter
- ballast (LED converter) integrated

Standard options



Special options



Lighting data / Norms


Lamps	LED Spot / CRI 80 / 2700 K
EPREL light sources	951661
Lifetime	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
System power	12.0 W
Luminaire luminous flux	1060 lm
System efficiency	88.33 lm/W
Module efficiency	127.71 lm/W
UGR class	≤22
Beam angle	40°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	II
Type of protection	IP20

Dimensions / Weights

Length	86 mm
Width	54 mm
Height	177 mm
Diameter of light head	48 mm
Net weight	0.30 kg
Gross weight	0.38 kg

TORL 201.827.40.2

Torpedo 200 (1xLED 12W 827/2700K 1060lm 40 °)



	C0	C90	C180	C270
0°	1942	1942	1942	1942
15°	1365	1365	1365	1365
30°	340	340	340	340
45°	47	47	47	47
60°	10	10	10	10
75°	1	1	1	1
90°	0	0	0	0

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	2.16	228.7
6.0	4.32	57.2
9.0	6.48	25.4
12.0	8.65	14.3
15.0	10.81	9.1

η	LED
Efficiency	88 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	12 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	20.8
UGR C90/C270	20.8
CIE Flux Codes	95 99 100 100 100
Ra/CRI	>80

LTS

Accessories



ST-A 10/9000A-1-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 1000 mm)



ST-A 20/9000A-2-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 2000 mm)



ST-A 30/9000A-3-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 3000 mm)



ST-A 40/9000A-4-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 4000 mm)



ST-A MONO/9000-BPU-D
 3-phase surface-mounted monopoint with bus option



ST-E 10/9000-1-R
 recessed track ONETrack with data bus
 (length: 1000 mm)



ST-E 20/9000-2-R
 recessed track ONETrack with data bus
 (length: 2000 mm)



ST-E 30/9000-3-R
 recessed track ONETrack with data bus
 (length: 3000 mm)



ST-E 40/9000-4-R
 recessed track ONETrack with data bus
 (length: 4000 mm)



ST-E MONO/9000-BPU-D
 3-phase recessed monopoint with bus option