


TORL 301.830.45.2/DALI-EU




Colours	Article no.	EAN
black	656980	4043544658739
silver	656981	4043544658746
white	656982	4043544658753

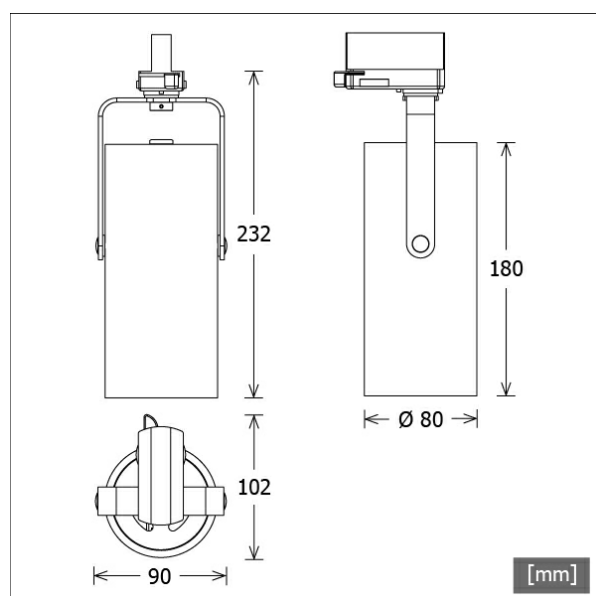

Description

- flexible track-mounted spotlight in compact cylindrical design
- luminaire rotates through 350° and pivots through 180° via U-bracket
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management via housing
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- housing cylinder and U-bracket made from aluminium
- clear safety glass
- 3-phase track adapter DALI (Eutrac)
- ballast (LED converter DALI, dimmable) integrated

Standard options



Special options



Lighting data / Norms


Lamps	LED Spot / CRI 80 / 3000 K
EPREL light sources	848117
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	
System power	13.0 W
Luminaire luminous flux	1290 lm
System efficiency	99.23 lm/W
Module efficiency	156.64 lm/W
UGR class	≤19
Beam angle	45°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights

Length	102 mm
Width	90 mm
Height	232 mm
Diameter of light head	80 mm
Net weight	0.92 kg
Gross weight	1.06 kg

TORL 301.830.45.2/DALI-EU

Torpedo 300 (1xLED 13W 830/3000K 1290lm 45 °)



	C0	C90	C180	C270
0°	1829	1829	1829	1829
15°	1398	1398	1398	1398
30°	391	391	391	391
45°	5	5	5	5
60°	0	0	0	0
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	2.35	262.2
6.0	4.70	65.5
9.0	7.05	29.1
12.0	9.40	16.4
15.0	11.75	10.5

η	LED
Efficiency	99 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	13 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	17.4
UGR C90/C270	17.4
CIE Flux Codes	99 100 100 100 100
Ra/CRI	>80

LTS

Accessories



ZBK 12
anti-glare flaps



ZBW 85
honeycomb louvre