




TORL 302.840.15.2



Colours	Article no.	EAN
black	657104	4043544659965
silver	657105	4043544659972
white	657106	4043544659989

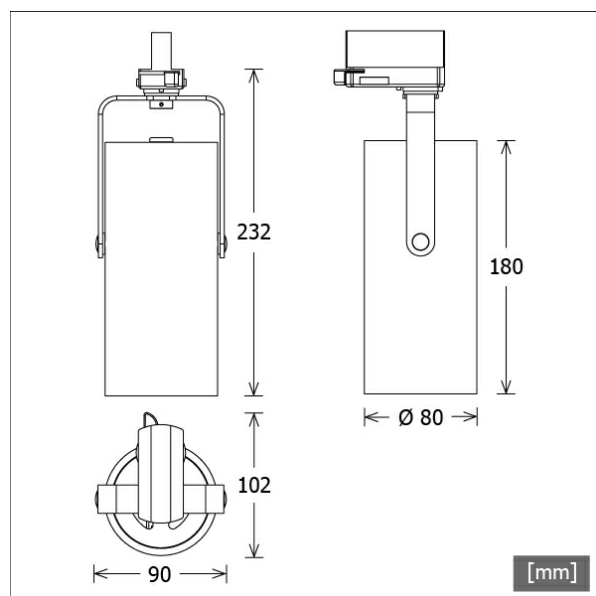

Description

- flexible track-mounted spotlight in compact cylindrical design
- luminaire rotates through 350° and pivots through 180° via U-bracket
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management via housing
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- housing cylinder and U-bracket made from aluminium
- clear safety glass
- 3-phase track adapter
- ballast (LED converter) integrated

Standard options



Special options



Lighting data / Norms

Lamps	LED Spot / CRI 80 / 4000 K
EPREL light sources	851282
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	
System power	24.6 W
Luminaire luminous flux	2680 lm
System efficiency	108.94 lm/W
Module efficiency	162.17 lm/W
UGR class	≤19
Beam angle	15°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20


Dimensions / Weights

Length	102 mm
Width	90 mm
Height	232 mm
Diameter of light head	80 mm
Net weight	0.86 kg
Gross weight	1.02 kg

TORL 302.840.15.2

Torpedo 300 (1xLED 25W 840/4000K 2680lm 15 °)

C0/C180 cd / 1000 lm



	C0	C90	C180	C270
0°	4920	4920	4920	4920
15°	1201	1201	1201	1201
30°	371	371	371	371
45°	3	3	3	3
60°	0	0	0	0
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

C0-C180 Plane		
3.0	0.86	1465.1
6.0	1.73	366.3
9.0	2.59	162.8
12.0	3.45	91.6
15.0	4.31	58.6

η	LED
Efficiency	107 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	25 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	19.4
UGR C90/C270	19.4
CIE Flux Codes	100 100 100 100 100
Ra/CRI	> 80

LTS

Accessories



ST-A 10/9000A-1-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 1000 mm)



ST-A 20/9000A-2-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 2000 mm)



ST-A 30/9000A-3-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 3000 mm)



ST-A 40/9000A-4-ST
 surface-mounted track ONETrack Advance with data bus
 (length: 4000 mm)



ST-A MONO/9000-BPU-D
 3-phase surface-mounted monopoint with bus option



ST-E 10/9000-1-R
 recessed track ONETrack with data bus
 (length: 1000 mm)



ST-E 20/9000-2-R
 recessed track ONETrack with data bus
 (length: 2000 mm)



ST-E 30/9000-3-R
 recessed track ONETrack with data bus
 (length: 3000 mm)



ST-E 40/9000-4-R
 recessed track ONETrack with data bus
 (length: 4000 mm)



ST-E MONO/9000-BPU-D
 3-phase recessed monopoint with bus option



ZBK 12
 anti-glare flaps



ZBW 85
 honeycomb louvre