




ASCL 11.1140.1 DIM



Colours	Article no.	EAN
silver	633706	4043544356086
white	633707	4043544356093

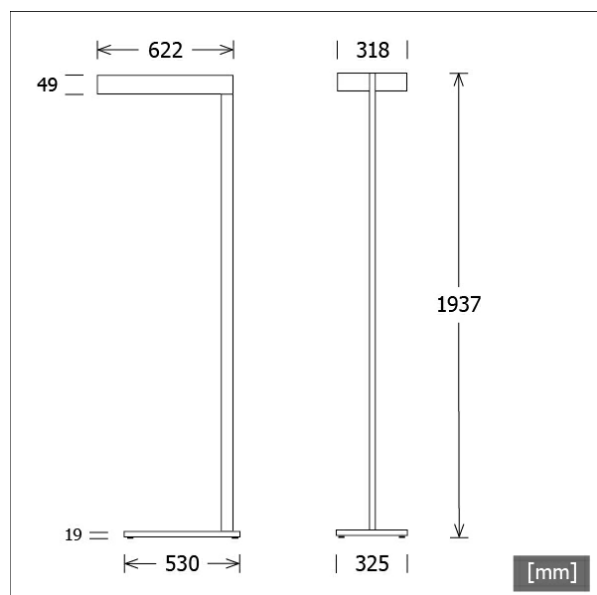

Description

- free-standing luminaire with direct-indirect illumination for uniform and glare-free workplace lighting
- light component: direct 40% / indirect 60%
- no UV and thermal emissions
- twin light-head made from die-cast aluminium
- standard base made from steel St37 (special version ZBB 002 please indicate when ordering)
- rectangular aluminium stand (silver luminaire with silver anodised stand)
- switchDIM with memory function (ON/OFF short pushbutton press, dimming UP/DOWN long pushbutton press)
- diffusers for direct light component made from prismatic acrylic glass, diffusers for indirect light component made from clear acrylic glass
- central plug connection to mains (length of connecting cable: approx. 3000 mm), silver luminaire / black cable, white luminaire / white cable
- ballast (LED converter) integrated in the stand

Standard options



Lighting data / Norms


Lamps	LED linear / CRI 80 / 4000 K
EPREL light sources	833878 833895
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	101.0 W
Luminaire luminous flux	7770 lm
System efficiency	76.93 lm/W
Module efficiency	186.57 lm/W
UGR class	≤16
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights

Length	622 mm
Width	325 mm
Height	1937 mm
Net weight	17.06 kg
Gross weight	18.26 kg

ASCL 11.1140.1 DIM

Ascona (1xLED 101W 840/4000K 7770lm)




	C0	C90	C180	C270
0°	232	232	232	232
30°	161	174	161	174
60°	15	14	15	14
90°	1	1	1	1
120°	101	98	101	98
150°	205	196	205	196
180°	231	231	231	231
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	77 lm/W
Direct/Indirect	↓ 36% / ↑ 64%
System Power	101 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	<10.0
UGR C90/C270	<10.0
CIE Flux Codes	74 96 99 36 100
Ra/CRI	>80

LTS

Accessories



ZBB 002
luminaire base version 2