




TPSA 180.3030.11




Colours	Article no.	EAN
silver	635924	4043544384102
white	635925	4043544384119
black	642423	4043544483157

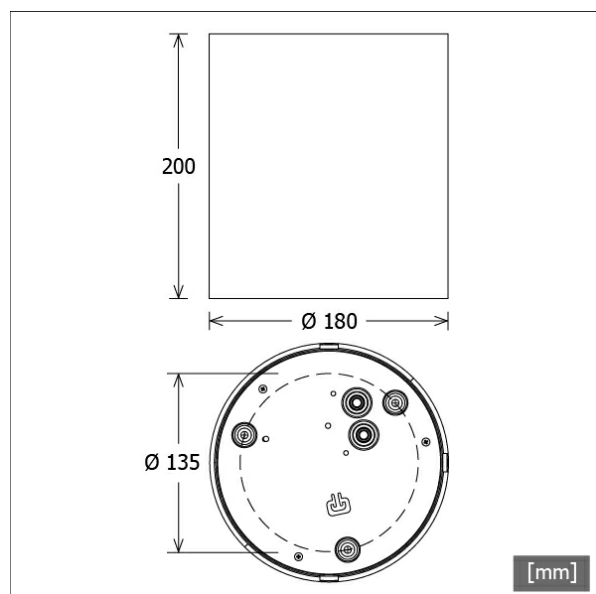

Description

- surface-mounted downlight for general lighting
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management via housing
- specular aluminium reflector with precise symmetrical beam characteristic for high luminous efficiency and glare-free lighting
- housing cylinder made from die-cast aluminium
- sheet steel mounting ring with bayonet catch and safety rope for screw mounting
- 5-pole terminal block
- ballast (LED converter) integrated

Standard options



Lighting data / Norms

Lamps	LED Modul / CRI 80 / 3000 K
EPREL light sources	891018
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	
System power	24.8 W
Luminaire luminous flux	2770 lm
System efficiency	111.69 lm/W
Module efficiency	119.10 lm/W
UGR class	≤19
Beam range	Wide Flood
Beam angle	60°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights


Outer diameter	180 mm
Height	200 mm
Net weight	2.99 kg
Gross weight	3.46 kg

TPSA 180.3030.11

TPSA 180.3030.11


Topas | Surface-mounted (1xLED 25W 830/3000K 2770lm)

C0/C180 cd / 1000 lm



	C0	C90	C180	C270
0°	1178	1178	1178	1178
15°	1008	1008	1008	1008
30°	579	579	579	579
45°	48	48	48	48
60°	0	0	0	0
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]



η	LED
Efficiency	111 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	25 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	17.5
UGR C90/C270	17.5
CIE Flux Codes	97 100 100 100 100
Ra/CRI	>80

LTS