




VFCPL 700.4540



Colours	Article no.	EAN
silver	634766	4043544369598
white	634767	4043544369604
black	646226	4043544526946

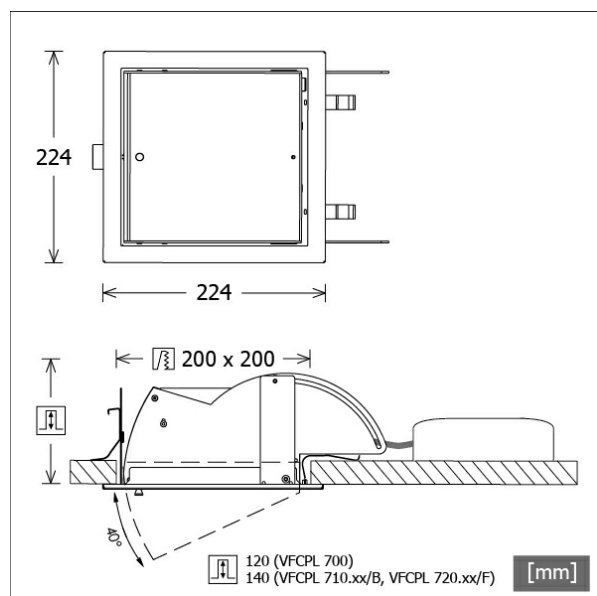

Description

- recessed wallwasher with asymmetrical light distribution for homogeneous lighting on vertical surfaces
- luminaire unit pivots out through 40° (stepless position lock)
- outstanding ease of maintenance
- no UV and thermal emissions
- thermal management with passive cooling (heat sink made from aluminium)
- non-reflective matt aluminium reflector for highest luminous efficiency and best glare-free lighting
- luminaire unit made from aluminium
- recessed frame made from sheet steel
- white printed toughened safety glass (easy opening via locking screw)
- tool-free ceiling mounting via quick-action clamping springs (automatic adjustment of the ceiling thickness)
- connection to ballast via luminaire cable with Mini-Clamp connector
- ballast (LED converter) included (external placement)

Notes

Minimum installation space BR05 = L 610 x B 300 x H 120 mm.

Standard options



Special options



Lighting data / Norms

Lamps	LED Spot / CRI 80 / 4000 K
EPREL light sources	848105
	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
Lifetime	
System power	41.0 W
Luminaire luminous flux	4970 lm
System efficiency	121.21 lm/W
Module efficiency	167.61 lm/W
UGR class	≤28
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	III
Type of protection	IP20


Dimensions / Weights

Length	224 mm
Width	224 mm
Height	125 mm
Cut-out (LxW)	200 x 200 mm
Ceiling thickness	5.0 - 30.0 mm
Recessed depth	120 mm
Net weight	2.80 kg

Recessed Spotlights · Vario Professional

VFCPL 700.4540

Gross weight




LTS
LOVE TO SHINE


2.96 kg

VFCPL 700.4540

Vario Professional (1xLED 41W 840/4000K 4970lm)



	C0	C90	C180	C270
0°	546	546	546	546
15°	541	541	541	541
30°	369	514	369	514
45°	61	438	61	438
60°	12	49	12	49
75°	8	8	8	8
90°	0	0	0	0
cd / 1000 lm				



η	LED
Efficiency	121 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	41 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.1
UGR C90/C270	28.2
CIE Flux Codes	74 97 99 100 99
Ra/CRI	>80

LTS