


VTFL-A 102.827/DALI



Description

- round surface-mounted downlight for diverse lighting tasks
- outstanding ease of maintenance
- no UV and thermal emissions
- innovative thermal management with passive cooling
- front ring and heat sink made from die-cast aluminium
- cylindrical housing made from aluminium
- microprism diffuser opal
- sheet steel mounting plate with snap-in fastener and safety rope for screw mounting
- 5-pole terminal block
- ballast (LED converter DALI, dimmable) integrated

Standard options






Lighting data / Norms

Lamps	LED Modul / CRI 80 / 2700 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	31.0 W
Luminaire luminous flux	2780 lm
System efficiency	89.67 lm/W
UGR class	≤28
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights


Outer diameter	260 mm
Height	117 mm
Net weight	1.86 kg
Gross weight	2.16 kg

Colours	Article no.	EAN
black	658996	4043544781895
silver	658997	4043544781901
white	658998	4043544781918

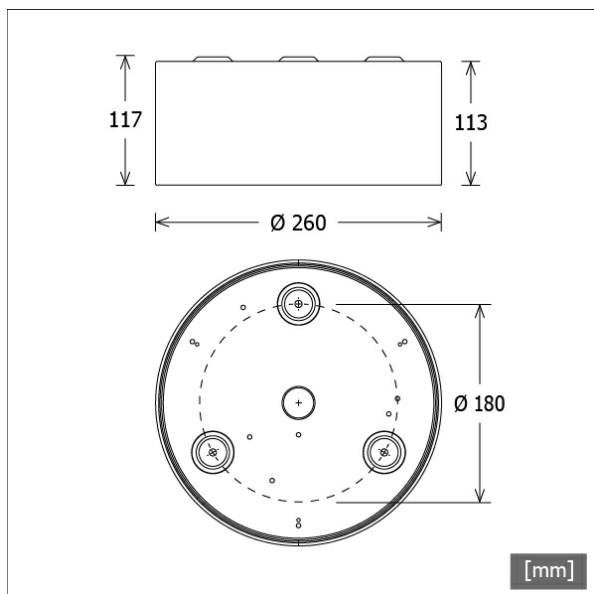

VTFL-A 102.827/DALI

Vale-Tu Flat Large | Surface-Mounted (1xLED 31W 827/2700K 2780lm)



	C0	C90	C180	C270
0°	455	455	455	455
15°	423	423	423	423
30°	340	340	340	340
45°	228	228	228	228
60°	126	126	126	126
75°	49	49	49	49
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	6.01	140.6
6.0	12.02	35.1
9.0	18.04	15.6
12.0	24.05	8.8
15.0	30.06	5.6

η	LED
Efficiency	90 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	31 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	27.1
UGR C90/C270	27.1
CIE Flux Codes	55 84 97 100 100
Ra/CRI	> 80

LTS

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
Organic Response sensor for surface mounting