


VTFM-A 101.830/DALI



Description

- round surface-mounted downlight for diverse lighting tasks
- outstanding ease of maintenance
- no UV and thermal emissions
- innovative thermal management with passive cooling
- front ring and heat sink made from die-cast aluminium
- cylindrical housing made from aluminium
- microprism diffuser opal
- sheet steel mounting plate with snap-in fastener and safety rope for screw mounting
- 5-pole terminal block
- ballast (LED converter DALI, dimmable) integrated

Standard options





Lighting data / Norms

Lamps	LED Modul / CRI 80 / 3000 K
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	20.4 W
Luminaire luminous flux	1760 lm
System efficiency	86.27 lm/W
UGR class	≤28
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights


Outer diameter	230 mm
Height	117 mm
Net weight	1.56 kg
Gross weight	1.84 kg

Colours	Article no.	EAN
black	659021	4043544782137
silver	659022	4043544782144
white	659023	4043544782151

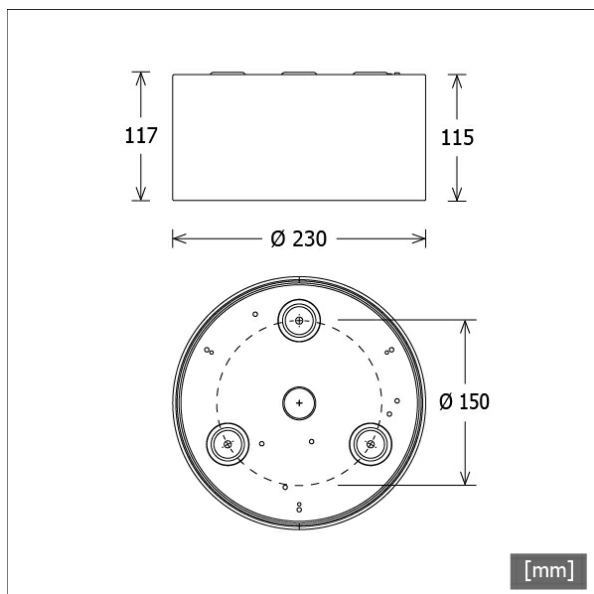

VTFM-A 101.830/DALI

Vale-Tu Flat Medium | Surface-Mounted (1xLED 20W 830/3000K 1760lm)



	C0	C90	C180	C270
0°	462	462	462	462
15°	429	429	429	429
30°	345	345	345	345
45°	230	230	230	230
60°	125	125	125	125
75°	45	45	45	45
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	5.99	90.3
6.0	11.98	22.6
9.0	17.97	10.0
12.0	23.96	5.6
15.0	29.95	3.6

η	LED
Efficiency	88 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	20 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	26.4
UGR C90/C270	26.4
CIE Flux Codes	56 85 98 100 100
Ra/CRI	> 80

LTS

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-A SENSOR
Organic Response sensor for surface mounting