


VTRS 12.0540.60/DALI



Colours	Article no.	EAN
black	663792	4043544729293

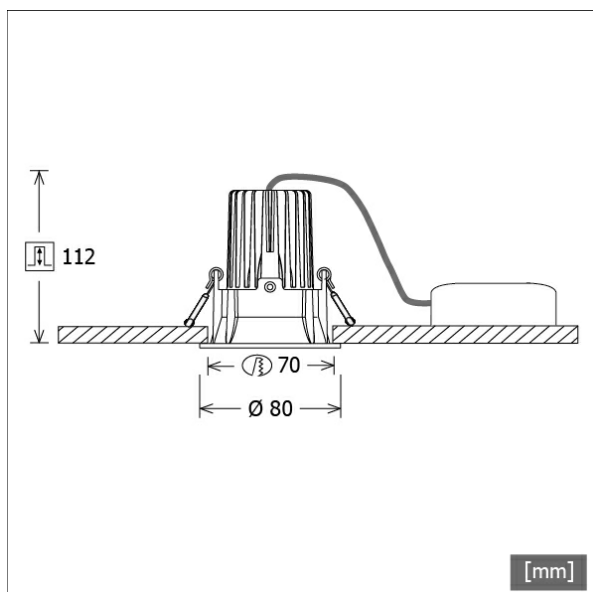

Description

- recessed spotlight with round recessed funnel
- reflector lens pivots through 20°
- outstanding ease of maintenance
- no UV and thermal emissions
- innovative thermal management with passive cooling
- recessed funnel and heat sink made from die-cast aluminium
- high-tech reflector lens made from PMMA for high luminous efficiency and glare-free lighting
- tool-free ceiling mounting via quick-action clamping springs (automatic adjustment of the ceiling thickness)
- luminaire and ballast permanently connected via cable (length: 500 mm), ballast ready for mains connection
- ballast (LED converter DALI, dimmable) included (external placement)

Standard options



Special options



Lighting data / Norms


Lamps	LED Spot / CRI 80 / 4000 K
EPREL light sources	871846
Lifetime	L90 B50 50.000 h L80 B50 100.000 h L80 B20 50.000 h
System power	12.0 W
Luminaire luminous flux	980 lm
System efficiency	81.66 lm/W
Module efficiency	132.06 lm/W
UGR class	≤28
Beam range	Wide Flood
Beam angle	59°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	II
Type of protection	IP40

Dimensions / Weights

Outer diameter	80 mm
Height	99 mm
Cut-out (Ø)	70 mm
Ceiling thickness	10.0 - 15.0 mm
Recessed depth	112 mm
Diameter of light head	50 mm
Net weight	0.52 kg
Gross weight	0.58 kg

VTRS 12.0540.60/DALI

Vale-Tu Round Small (1xLED 12W 840/4000K 980lm)



	C0	C90	C180	C270
0°	979	979	979	979
15°	817	817	817	817
30°	481	481	481	481
45°	125	125	125	125
60°	35	35	35	35
75°	19	19	19	19
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
C0-C180 Plane		
3.0	3.42	106.5
6.0	6.84	26.6
9.0	10.26	11.8
12.0	13.68	6.7
15.0	17.11	4.3

η	LED
Efficiency	82 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	12 W
UGR	
X=4H, Y=8H	
Reflection factors	70/50/20
UGR C0/C180	28.0
UGR C90/C270	28.0
CIE Flux Codes	
Ra/CRI	82 94 99 100 100
	> 80

LTS

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-R SENSOR
Organic Response sensor for recessed mounting