




VTSM 12.0530.60/DALI




Description

- recessed spotlight with square recessed funnel
- reflector lens pivots through 20°
- outstanding ease of maintenance
- no UV and thermal emissions
- innovative thermal management with passive cooling
- recessed funnel and heat sink made from die-cast aluminium
- high-tech reflector lens made from PMMA for high luminous efficiency and glare-free lighting
- tool-free ceiling mounting via quick-action clamping springs (automatic adjustment of the ceiling thickness)
- connection to ballast via luminaire cable with Mini-Clamp connector
- ballast (LED converter DALI, dimmable) included (external placement)




Standard options



Special options



Colours	Article no.	EAN
black	663718	4043544728524

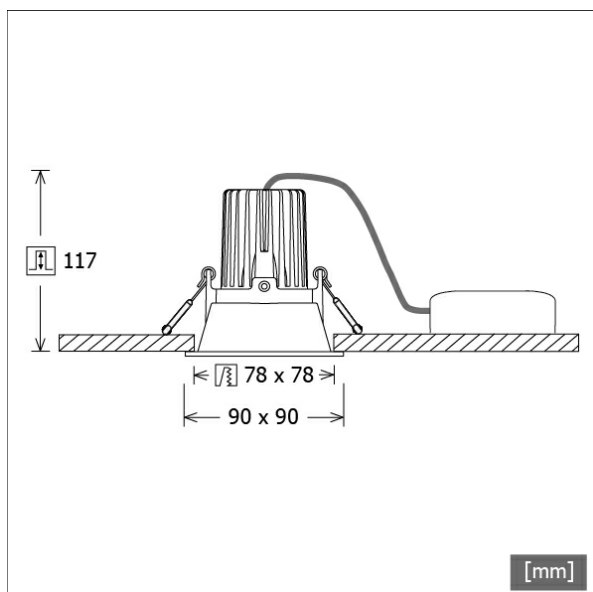

Lighting data / Norms

Lamps	LED Spot / CRI 80 / 3000 K
EPREL light sources	871340
Lifetime	L90 B50 50.000 h
	L80 B50 100.000 h
	L80 B20 50.000 h
System power	12.0 W
Luminaire luminous flux	1010 lm
System efficiency	84.16 lm/W
Module efficiency	128.30 lm/W
UGR class	≤28
Beam angle	60°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	III
Type of protection	IP40


Dimensions / Weights

Length	90 mm
Width	90 mm
Height	104 mm
Cut-out (LxW)	78 x 78 mm
Ceiling thickness	10.0 - 15.0 mm
Recessed depth	117 mm
Diameter of light head	50 mm
Net weight	0.56 kg
Gross weight	0.61 kg

VTSM 12.0530.60/DALI

Vale-Tu Square Medium (1xLED 12W 830/3000K 1010lm)

C0/C180 cd / 1000 lm



	C0	C90	C180	C270
0°	1004	1004	1004	1004
15°	832	832	832	832
30°	490	490	490	490
45°	119	119	119	119
60°	35	35	35	35
75°	17	17	17	17
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	3.40	112.7
6.0	6.79	28.2
9.0	10.19	12.5
12.0	13.59	7.0
15.0	16.99	4.5

η	LED
Efficiency	84 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	12 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	26.9
UGR C90/C270	26.9
CIE Flux Codes	83 95 99 100 100
Ra/CRI	>80

LTS

Accessories



ZB-OR DONGLE
Organic Response IR dongle kit



ZB-OR GATEWAY
Organic Response IoT Gateway Cascade Series



ZB-OR-R SENSOR
Organic Response sensor for recessed mounting