

# VTSS 10.0530.60




## Description

- recessed spotlight with square recessed funnel
- reflector lens pivots through 20°
- outstanding ease of maintenance
- no UV and thermal emissions
- innovative thermal management with passive cooling
- recessed funnel and heat sink made from die-cast aluminium
- high-tech reflector lens made from PMMA for high luminous efficiency and glare-free lighting
- tool-free ceiling mounting via quick-action clamping springs (automatic adjustment of the ceiling thickness)
- connection to ballast via luminaire cable with Mini-Clamp connector
- ballast (LED converter) included (external placement)




## Standard options



## Special options



| Colours | Article no. | EAN           |
|---------|-------------|---------------|
| silver  | 663729      | 4043544728630 |

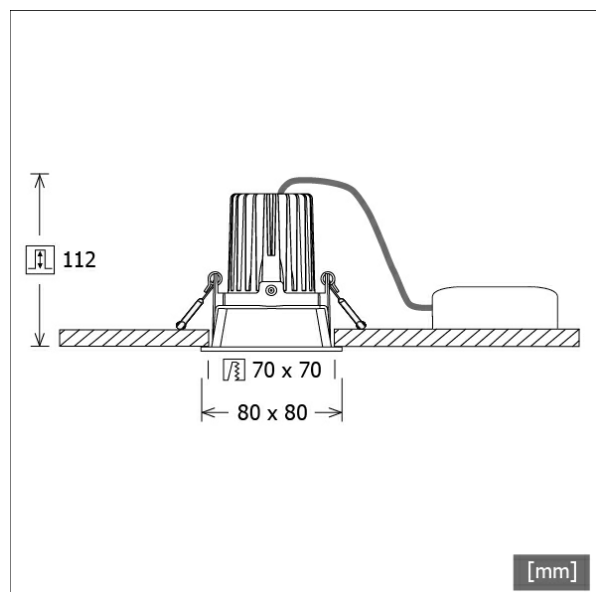

## Lighting data / Norms

|                         |                            |
|-------------------------|----------------------------|
| Lamps                   | LED Spot / CRI 80 / 3000 K |
| EPREL light sources     | 871340                     |
|                         | L90 B50 50.000 h           |
|                         | L80 B50 100.000 h          |
|                         | L80 B20 50.000 h           |
| Lifetime                | 12.0 W                     |
| System power            | 940 lm                     |
| Luminaire luminous flux | 78.33 lm/W                 |
| System efficiency       | 128.30 lm/W                |
| Module efficiency       | ≤28                        |
| UGR class               | 60°                        |
| Beam angle              | 220 - 240 V / 50 - 60 Hz   |
| Supply voltage          | III                        |
| Protection class        | IP40                       |
| Type of protection      |                            |

## Dimensions / Weights

|                        |                |
|------------------------|----------------|
| Length                 | 80 mm          |
| Width                  | 80 mm          |
| Height                 | 98 mm          |
| Cut-out (LxW)          | 70 x 70 mm     |
| Ceiling thickness      | 10.0 - 15.0 mm |
| Recessed depth         | 112 mm         |
| Diameter of light head | 50 mm          |
| Net weight             | 0.49 kg        |
| Gross weight           | 0.52 kg        |

VTSS 10.0530.60

Vale-Tu Square Small (1xLED 12W 830/3000K 940lm)

