




ZB-OR-A SENSOR



Colours	Article no.	EAN
silver	667798	4043544771360
black	667799	4043544771377
white	667800	4043544771384

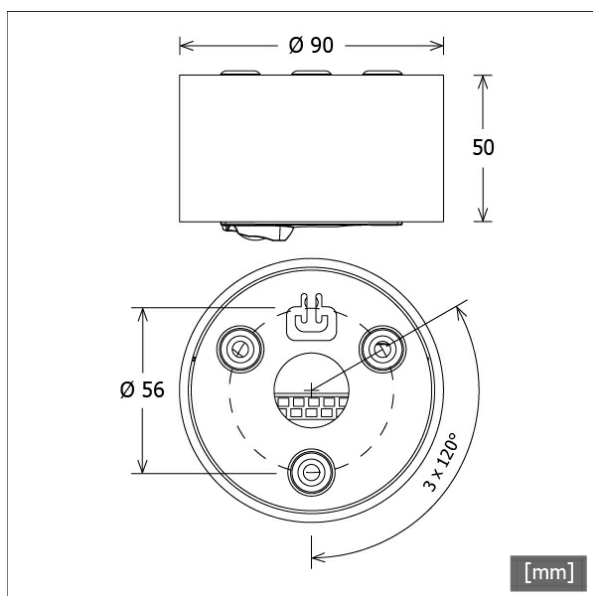

Description

- organic Response sensor for ceiling mounting
- sensor with innovative occupancy and daylight detection and integrated DALI PS3
- power supply directly from LED ballast via 2-wire DALI interface
- sensors communicate with each other via proprietary IR messaging
- rF mesh communication between sensor and gateway
- housing tube made from aluminium
- current consumption: 0.0172 A
- output: DALI
- maximum number of DALI drivers that can be connected: 12
- dALI voltage: 16 V (min. 13,6 V - max. 18,4 V)
- ambient temperature: 0 - 50 °C
- screw mounting on ceiling or wall via sheet steel mounting plate with safety rope (magnetic fixing)
- 5-pole terminal block

Notes

Silver housing also available with black sensor.

Lighting data / Norms

Type of protection IP20

Dimensions / Weights

Outer diameter	90 mm
Height	50 mm
Net weight	0.32 kg
Gross weight	0.36 kg