




ZB-OR-T SENSOR



Colours	Article no.	EAN
silver	667801	4043544771391
black	667802	4043544771407
white	667803	4043544771414

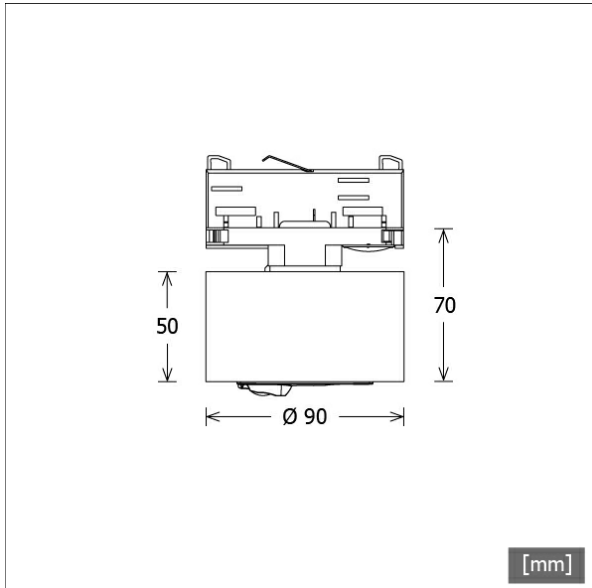

Description

- organic Response sensor with universal for track mounting
- sensor with innovative occupancy and daylight detection and integrated DALI PS3
- power supply directly from LED ballast via 2-wire DALI interface
- sensors communicate with each other via proprietary IR messaging
- rF mesh communication between sensor and gateway
- housing tube made from aluminium
- typ current: 0.0172 A
- maximum number of DALI drivers that can be connected: 12
- typ. DALI DC voltage level: 16 V (min. 13.6 V - max. 18.4 V)
- ambient temperature: 0 - 50 °C
- compatible tracks: LTS ONETrack, Eutrac, Global, Stucchi, Iguzzini, Ivela, Nordic Global (further tracks on request)
- 3-phase track adapter DALI (ONETrack)

Notes

Silver housing also available with black sensor.

Lighting data / Norms

Type of protection IP20

Dimensions / Weights

Outer diameter	90 mm
Height	70 mm
Net weight	0.40 kg
Gross weight	0.54 kg