





ZIR 300.1530/SENSO



Colours	Article no.	EAN
white	652458	4043544611765

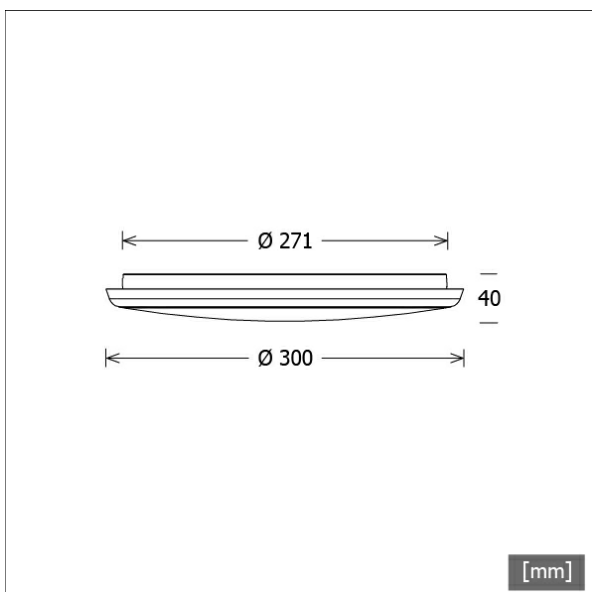

Description

- ceiling luminaire with wide range of applications
- with sensor for presence and daylight (adjustable with DIP switch and emergency lighting function (3 h)
- outstanding ease of maintenance
- housing made from plastic
- diffuser made from opal polycarbonate
- easy screw mounting via ceiling bracket
- 3-pole terminal block
- ballast (LED converter) integrated

Standard options



Lighting data / Norms

Lamps	LED Modul / CRI 80 / 3000 K
Lifetime	L70 B50 30.000 h
System power	20.0 W
Luminaire luminous flux	1660 lm
System efficiency	83.00 lm/W
UGR class	≤25
Beam angle	120°
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP54


Dimensions / Weights

Outer diameter	300 mm
Height	40 mm
Net weight	1.22 kg
Gross weight	1.29 kg

ZIR 300.1530/SENSO

Zirra (1xLED 20W 830/3000K 1660lm 120 °)

C0/C180 cd / 1000 lm



	C0	C90	C180	C270
0°	349	349	349	349
15°	332	332	332	332
30°	293	293	293	293
45°	232	232	232	232
60°	154	154	154	154
75°	68	68	68	68
90°	3	3	3	3
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	9.01	64.3
6.0	18.02	16.1
9.0	27.02	7.1
12.0	36.03	4.0
15.0	45.04	2.6

η	LED
Efficiency	83 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	20 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	24.3
UGR C90/C270	24.3
CIE Flux Codes	47 78 95 100 100
Ra/CRI	>80

LTS